


TWENTY

Sospensione

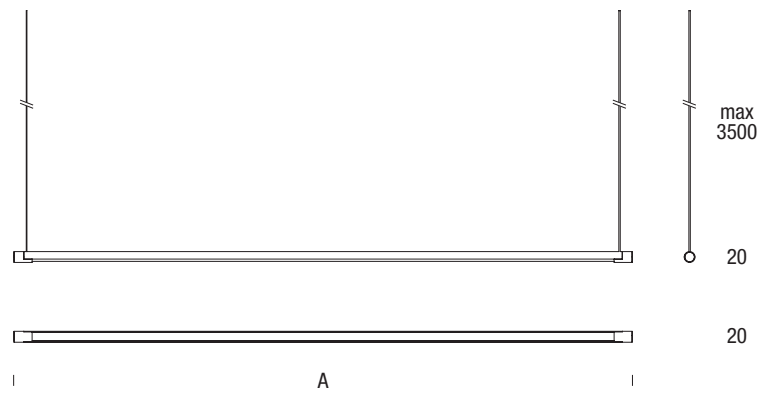

Model	Power	Lumen output	Dimension A	Code to complete *
1100	20 W	1620 lm	1184 mm	VS-AA + ■ ▲
1700	34 W	2754 lm	1743 mm	VS-AB + ■ ▲
2200	40 W	3240 lm	2302 mm	VS-AC + ■ ▲


◆ 24Vdc | IP40

UP to 81 lm/W | opal diffuser | L70/B50 > 36.000 h. | CRI>90 | RG0
Lumen output values: luminaire luminous flux at 4000 K

* Select your option

CCT	Colour
2700 K 1	Bianco WW
3000 K 2	Nero BB
4000 K 3	Grigio lunare GG
	Champagne EE
	Tabacco OO

ACCESSORI




Description	Code to complete *
Rosone 220-240Vac, alimentatore incluso	VSS02 + ● ●●
Incasso 220-240Vac, alimentatore incluso	VSS04 + ● ●●

* Select your option

Colour	Control
Bianco W	On/Off NF
Nero B	DALI DA
	Push PU

Sospensione Verticale



Model	Power	Lumen output	Dimension A	Code to complete *
600	10 W	883 lm	665 mm	VR-BF + ■ ▲
900	16 W	1325 lm	887 mm	VR-BG + ■ ▲
1100	20 W	1620 lm	1136 mm	VR-BA + ■ ▲


◆ 24Vdc | IP40

UP to 81 lm/W | opal diffuser | L70/B50 > 36.000 h. | CRI>90 | RG0
Lumen output values: luminaire luminous flux at 4000 K

*** Select your option**

CCT		Colour	
2700 K	1	Bianco	WW
3000 K	2	Nero	BB
4000 K	3	Grigio lunare	GG
		Champagne	EE
		Tabacco	OO

ACCESSORI



Description	Code to complete *
Rosone 220-240Vac, alimentatore incluso ⊕	VSS03 + ● NF




Incasso 220-240Vac, alimentatore incluso □	VSS04 + ● ■
---	-------------

*** Select your option**

Colour		Control	
Bianco	W	On/Off	NF
Nero	B	DALI	DA
		Push	PU

TWENTY

Tesata Verticale

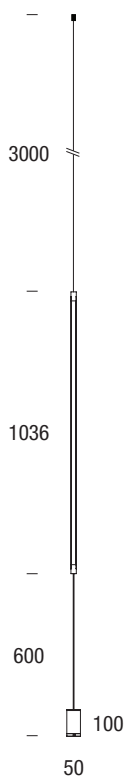

Dimmer a pedale con memoria
Foot dimmer with memory

Model	Power	Lumen output	Code to complete *
1100	20 W	1620 lm	VV-BA + ■ ▲

□ 220÷240Vac | IP40


UP to 81 lm/W | opal diffuser | L70/B50 > 36.000 h. | CRI>90 | RG0
Lumen output values: luminaire luminous flux at 4000 K

*** Select your option**

CCT	■	Colour	▲
2700 K	1	Bianco	WW
3000 K	2	Nero	BB
4000 K	3	Grigio lunare	GG
		Champagne	EE
		Tabacco	OO

TWENTY

Parete

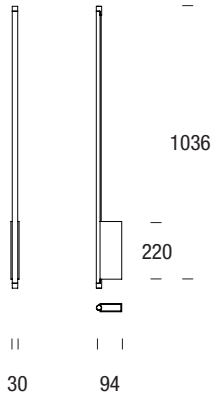

Model	Power	Lumen output	Code to complete *
1100	20 W	1620 lm	VW-BA + ■ ■ ■ △

□ 220÷240Vac | IP40


UP to 81 lm/W | opal diffuser | L70/B50 > 36.000 h. | CRI>90 | RGO
Lumen output values: luminaire luminous flux at 4000 K

* Select your option

CCT	■	Control	■■	Colour	△
2700 K	1	On/Off	NF	Bianco	WW
3000 K	2	DALI	DA	Nero	BB
4000 K	3			Grigio lunare	GG
				Champagne	EE
				Tabacco	00

TWENTY

Plafone/Parete

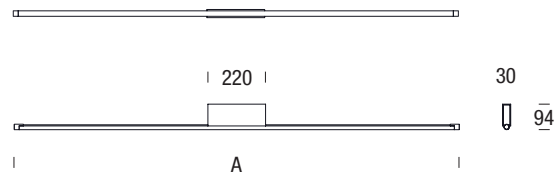

Diretta

Model	Power	Lumen output	Dimension A	Code to complete *
1700	34 W	2754 lm	1636 mm	VC-AB + ■ :: △

Riflessa

1700	27 W	2187 lm	1636 mm	VC-BB + ■ :: △
------	------	---------	---------	----------------

220÷240Vac | IP40


UP to 81 lm/W | opal diffuser | L70/B50 > 36.000 h. | CRI>90 | RG0
Lumen output values: luminaire luminous flux at 4000 K

* Select your option

CCT	■	Control	::	Colour	△
2700 K	1	On/Off	NF	Bianco	WW
3000 K	2	DALI	DA	Nero	BB
4000 K	3			Grigio lunare	GG
				Champagne	EE
				Tabacco	00

TWENTY

Da Terra

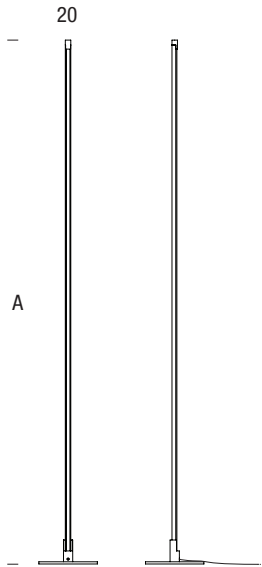

Dimmer a pedale con memoria
Foot dimmer with memory

Model	Power	Lumen output	Dimension A	Code to complete *
1900	38 W	3078 lm	1900 mm	VE-OD + ■ ▲
2400	44 W	3564 lm	2400 mm	VE-OE + ■ ▲

□ 220÷240Vac | IP40

UP to 81 lm/W | opal diffuser | L70/B50 > 36.000 h. | CRI>90 | RGO
Lumen output values: luminaire luminous flux at 4000 K

* Select your option

CCT	■	Colour	▲
2700 K	1	Bianco	WW
3000 K	2	Nero	BB
4000 K	3	Grigio lunare	GG
		Champagne	EE
		Tabacco	OO

BASE



| 215 |

Description	Code to complete *
Base	VE-P + ■■

Base colour	■■
Bianco	WW
Nero	BB
Grigio lunare	GG
Champagne	EE
Tabacco	OO