

### Segno System Trimless


**CTD64510CA** - Module for trimless recessed mounting - downlight - single switch - 2250 mm. - 48 W - 4000 K / 4000 K / CRI > 91

#### DESCRIPTION

**Segno Trimless is a system for continuous linear recessed lighting, which can be simply and fastly installed trimless. The ceiling finishing operations are completed before the electrical installation, which can be carried out in total cleanliness and without powder. The trimless recessed versions are made from structural modules that are installed on false ceiling frames thanks to the "Click & Lock" snap spring system.**

Switch

**Casambi**

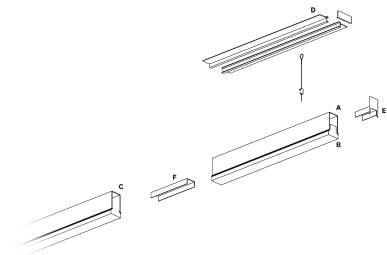

#### PRODUCTS CHARACTERISTICS

|                                |                     |
|--------------------------------|---------------------|
| installation type              | <b>Linear light</b> |
| material                       | <b>Aluminum</b>     |
| Finish                         | <b>Painted</b>      |
| Color                          | <b>White</b>        |
| Power                          | <b>48 W</b>         |
| Lumen output - Direct emission | <b>8800 lm</b>      |
| Efficacy                       | <b>183 lm/W</b>     |
| Dimensions                     | <b>2250 mm.</b>     |



#### ELECTRICAL CHARACTERISTICS

|                  |                  |
|------------------|------------------|
| feeding          | <b>220÷240 V</b> |
| driver           | <b>Casambi</b>   |
| Insulation class | <b>Class I</b>   |

#### MECHANICAL CHARACTERISTICS

|                 |             |
|-----------------|-------------|
| product IP rate | <b>IP20</b> |
|-----------------|-------------|

### Segno System Trimless

**CTD64510CA** - Module for trimless recessed mounting - downlight - single switch - 2250 mm. - 48 W - 4000 K / 4000 K / CRI > 91

#### LED SOURCE DETAILS

|                      |                                    |
|----------------------|------------------------------------|
| led source type      | <b>SMD Led</b>                     |
| Photobiological risk | <b>RG 1 Low risk ( IEC 62471 )</b> |
| LED brand            | <b>TCI or equivalent</b>           |
| Service lifetime     | <b>L80 / B20 - 80.000 h.</b>       |
| Light temperature    | <b>4000 K</b>                      |
| CRI                  | <b>CRI &gt; 91</b>                 |
| SDCM                 | <b>&lt; 3</b>                      |

#### DRIVER CHARACTERISTICS

|        |                |
|--------|----------------|
| driver | <b>Casambi</b> |
|--------|----------------|

#### LIGHTING DETAILS

|                     |                  |
|---------------------|------------------|
| emission            | <b>Downlight</b> |
| Beam angle - direct | <b>60°</b>       |
| UGR                 | <b>&lt; 19</b>   |

#### PHOTOMETRIC

