

### Perth

EST00030 - 9 W / 3000 K / CRI >80

#### DESCRIPTION


Outdoor wall-mounted luminaire. Painted aluminium body. Safety glass front screen . Integrated high efficiency LED light source. Direct emission downwards. Electronic driver integrated in the fixture. IP54 protection.



#### PRODUCTS CHARACTERISTICS

installation type  
material  
Finish  
Color  
Power  
Lumen output - Full emission  
net weight

**Wall Mounting**  
**Aluminum**  
**Painted**  
**Gray**  
**9 W**  
**650 lm**  
**2 kg.**

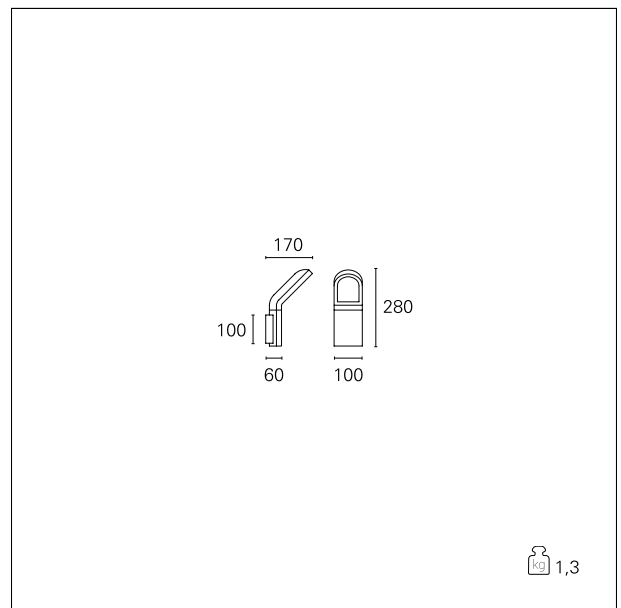

#### ELECTRICAL CHARACTERISTICS

feeding **220÷240 V**  
driver **On:Off**  
Insulation class **Class I**

#### MECHANICAL CHARACTERISTICS

product IP rate **IP54**  
IK **IK06**

### Perth

EST00030 - 9 W / 3000 K / CRI >80

#### LED SOURCE DETAILS

led source type	<b>SMD Led</b>
Light source connection	<b>LED</b>
Light temperature	<b>3000 K</b>
CRI	<b>CRI &gt;80</b>

#### LIGHTING DETAILS

emission	<b>Direct</b>
optic	<b>110° / -25° ÷ 75°</b>

#### PHOTOMETRIC

