

Gard

EST289 - 7 W / 3000 K / CRI >80

DESCRIPTION


Outdoor wall-mounted luminaire. Painted aluminium body. Integrated high efficiency LED light source. Direct emission downwards. Electronic driver integrated in the fixture. IP54 protection.



PRODUCTS CHARACTERISTICS

installation type
material
Finish
Color
Power
Lumen output - Full emission
net weight

Wall Mounting
Aluminum die casting
Painted
Anthracite
7 W
500 lm
0,70 kg.

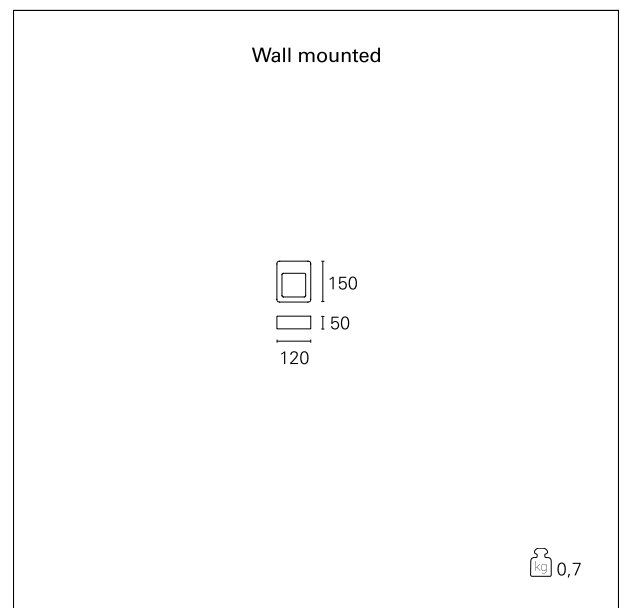

ELECTRICAL CHARACTERISTICS

feeding **220÷240 V**
driver **On:Off**
Insulation class **Class I**

MECHANICAL CHARACTERISTICS

product IP rate **IP54**
IK **IK06**

Gard

EST289 - 7 W / 3000 K / CRI >80

LED SOURCE DETAILS

led source type	Power Led
Light source connection	LED
Light temperature	3000 K
CRI	CRI >80

LIGHTING DETAILS

emission	Direct
optic	90°

PHOTOMETRIC

