

### Smok

**EST34012** - 4,5 W - Asymmetric / 3000 K / CRI >80

#### DESCRIPTION


**Wall luminaire. Thermoplastic material body. Polycarbonate screen. Integrated high efficiency LED light source. For diffused light effects. Electronic driver integrated in the fixture. IP65 protection.**



#### PRODUCTS CHARACTERISTICS

installation type  
material  
Color  
Power  
Lumen output - Full emission  
net weight

**Wall and Ceiling Mounted  
Thermoplastic  
Gray  
4,5 W  
70 lm  
0,60 kg.**

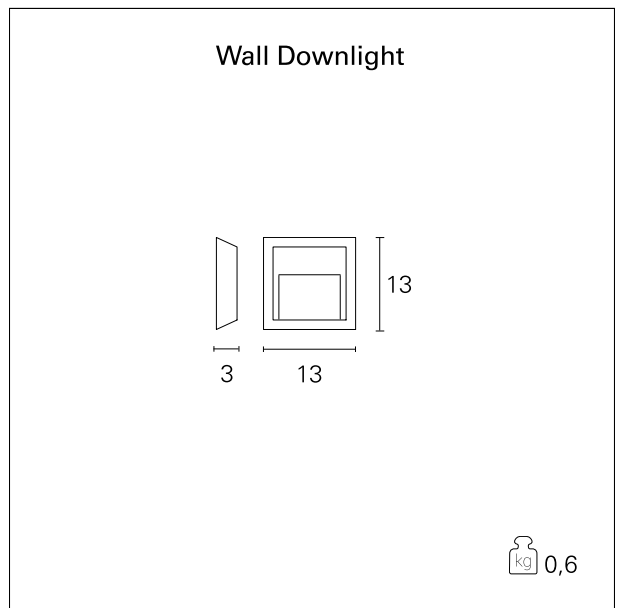

#### ELECTRICAL CHARACTERISTICS

feeding **220÷240 V**  
driver **On:Off**  
Insulation class **Class II**

#### MECHANICAL CHARACTERISTICS

product IP rate **IP65**

### Smok

**EST34012** - 4,5 W - Asymmetric / 3000 K / CRI >80

---

#### LED SOURCE DETAILS

---

led source type	<b>SMD Led</b>
Light source connection	<b>LED</b>
Light temperature	<b>3000 K</b>
CRI	<b>CRI &gt;80</b>

#### LIGHTING DETAILS

---

emission	<b>Direct</b>
----------	---------------