

### Oblò Micro

EST355 - 5 W - Rounded / 4000 K / CRI >80


#### DESCRIPTION

Oblò Micro is a recessed floor luminaire for outdoor environments; it can be walked on and is particularly indicated as a path marker along external paths; the body is in die-cast aluminum and is completed with a round or square ring made of AISI 304 stainless steel: its reduced thickness and its flared edge prevent accidental tripping. The LED source with included GX53 socket emits softly diffused light, eliminating any form of glare from any viewing angle. Four allen screws ensure the correct coupling between the ring and the body while maintaining the impermeability of the optical compartment even after the source is replaced. Oblò' Micro is equipped with a double cable gland for In/Out connections and is supplied with the concerning PVC sleever.



#### PRODUCTS CHARACTERISTICS

installation type	<b>Small Ingrounds</b>
material	<b>Aluminum die casting</b>
Finish	<b>AISI 305 steel</b>
Color	<b>AISI 304 steel</b>
Power	<b>5 W</b>
Lumen output - Full emission	<b>400 lm</b>
Efficacy	<b>80 lm/W</b>
net weight	<b>0,70 kg.</b>

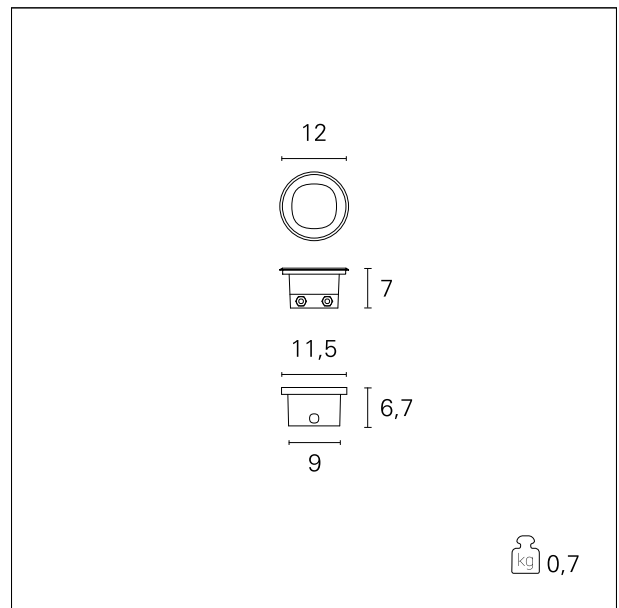

#### ELECTRICAL CHARACTERISTICS

feeding	<b>220÷240 V</b>
driver	<b>On÷Off</b>
Insulation class	<b>Class I</b>

#### MECHANICAL CHARACTERISTICS

product IP rate	<b>IP67</b>
-----------------	-------------

### Oblò Micro

**EST355** - 5 W - Rounded / 4000 K / CRI >80

---

#### LED SOURCE DETAILS

---

led source type	<b>LED</b>
Light source connection	<b>GX53</b>
Light temperature	<b>4000 K</b>
CRI	<b>CRI &gt;80</b>

#### LIGHTING DETAILS

---

emission	<b>Indirect</b>
----------	-----------------