

Win

EST449 - 2x 3 W - Uplight / Downlight / 3000 K / CRI >80


DESCRIPTION

Win is made of die-cast aluminum and is suitable for a grazing lighting of walls and facades; it is suitable for wall installation and is equipped with an integrated driver and high efficiency LED sources. Win is available in the three colours white, grey and anthracite, and in the two different versions up/down and up/down with diffuser; both configurations are characterized by adjustable flaps, positioned in correspondence with both up and down emissions of the luminaire, which allow to gradually darken the light beams emitted, personalizing the luminous effect on the wall. The version with diffuser has an additional third led which, through the opal front glass, illuminates the surrounding area with soft and diffused light. Win can be installed on the wall thanks to the base independent from the body which facilitates the correct alignment of the fixing.



PRODUCTS CHARACTERISTICS

installation type	Wall and Ceiling Mounted
material	Aluminum die casting
Color	Anthracite
Power	2x 3 W
Lumen output - Full emission	350 lm
net weight	1,2 kg.

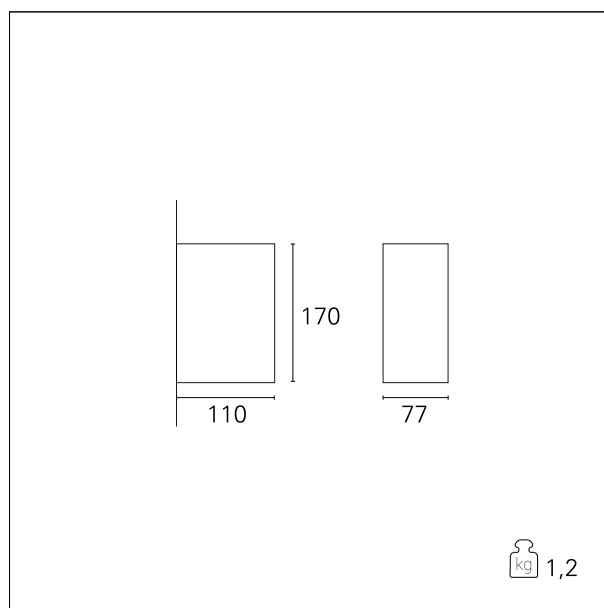

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
driver	On÷Off
Insulation class	Class I

MECHANICAL CHARACTERISTICS

Win

EST449 - 2x 3 W - Uplight / Downlight / 3000 K / CRI >80

product IP rate
IK

IP54
IK06

LED SOURCE DETAILS

led source type
Light source connection
Light temperature
CRI

Power Led
LED
3000 K
CRI >80

LIGHTING DETAILS

emission
optic

Direct / Indirect
0°-100°

PHOTOMETRIC

