

Connection

EST473 - LED 18 W - Uplight / Downlight / 3000 K / CRI >80


DESCRIPTION

The Connection series offers a wide range of outdoor luminaires to be installed on façades; The body of the fixture is available in two different versions: with two openings for uplight / downlight effects or with three openings for diffused light effects. Made of die-cast painted aluminum, the fixtures of the series Connection can be easily installed thanks to their base which acts as a wall fixing plate; they are equipped with E27 lamp holder or with SMD Led and driver. They have opal screens and are available in three colours white, grey and rust.



PRODUCTS CHARACTERISTICS

installation type	Wall and Ceiling Mounted
material	Aluminum die casting
Color	Gray
Power	18 W
Lumen output - Full emission	600 lm
net weight	1,2 kg.

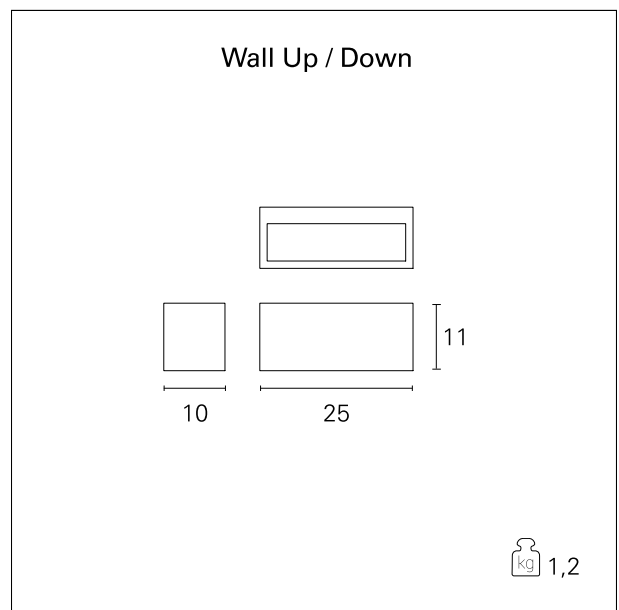

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
driver	On:Off
Insulation class	Class I

MECHANICAL CHARACTERISTICS

product IP rate	IP54
-----------------	-------------

Connection

EST473 - LED 18 W - Uplight / Downlight / 3000 K / CRI >80

LED SOURCE DETAILS

led source type	SMD Led
Light source connection	LED
Light temperature	3000 K
CRI	CRI >80

LIGHTING DETAILS

emission	Direct / Indirect
optic	Up / Down

PHOTOMETRIC

