

### Connection

**EST474** - LED 18 W - Uplight / Downlight / 3000 K / CRI >80


### DESCRIPTION

The Connection series offers a wide range of outdoor luminaires to be installed on façades; The body of the fixture is available in two different versions: with two openings for uplight / downlight effects or with three openings for diffused light effects. Made of die-cast painted aluminum, the fixtures of the series Connection can be easily installed thanks to their base which acts as a wall fixing plate; they are equipped with E27 lamp holder or with SMD Led and driver. They have opal screens and are available in three colours white, grey and rust.



### PRODUCTS CHARACTERISTICS

installation type	<b>Wall and Ceiling Mounted</b>
material	<b>Aluminum die casting</b>
Color	<b>Rust</b>
Power	<b>18 W</b>
Lumen output - Full emission	<b>600 lm</b>
net weight	<b>1,2 kg.</b>

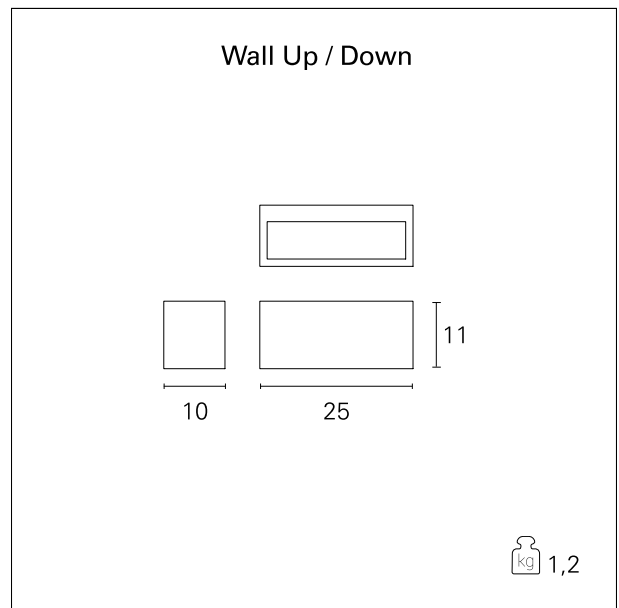

### ELECTRICAL CHARACTERISTICS

feeding	<b>220÷240 V</b>
driver	<b>On:Off</b>
Insulation class	<b>Class I</b>

### MECHANICAL CHARACTERISTICS

product IP rate	<b>IP54</b>
-----------------	-------------

### Connection

**EST474** - LED 18 W - Uplight / Downlight / 3000 K / CRI >80

### LED SOURCE DETAILS

led source type	<b>SMD Led</b>
Light source connection	<b>LED</b>
Light temperature	<b>3000 K</b>
CRI	<b>CRI &gt;80</b>

### LIGHTING DETAILS

emission	<b>Direct / Indirect</b>
optic	<b>Up / Down</b>

### PHOTOMETRIC

