

Shock

EST50000 - 12+12 W - Wall mounted - Uplight / Downlight / 3000 K / CRI >80


DESCRIPTION

The Shock series is particularly suitable for the lighting of paths, facades and outdoor covered areas. Made of die-cast aluminum, the luminaires is available in three different versions: ceiling downlighter, single and dual emission wall mounting; all versions can be installed quickly thanks to the fixing base that can be separated from the body, and are complete with die-cast front ring with transparent safety tempered glass. Shock is equipped with drivers in the body of the fixture, high efficiency CoB Led and roto-symmetrical 40° optic with curved facets. It is available in matt white and matt grey colour.



PRODUCTS CHARACTERISTICS

installation type	Wall and Ceiling Mounted
material	Aluminum
Color	Gray
Power	12+12 W
Lumen output - Full emission	1600 lm
net weight	1,6 kg.

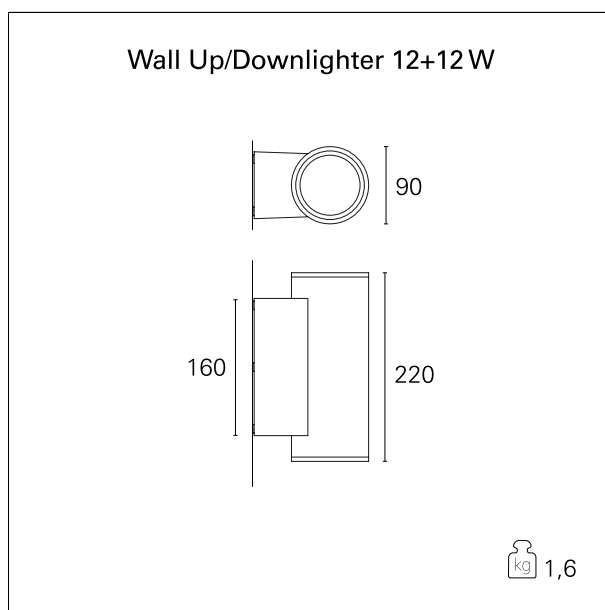

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
driver	On÷Off
Insulation class	Class I

MECHANICAL CHARACTERISTICS

product IP rate	IP65
IK	IK06

Shock

EST50000 - 12+12 W - Wall mounted - Uplight / Downlight / 3000 K / CRI >80

LED SOURCE DETAILS

led source type	CoB Led
Light source connection	LED
Service lifetime	L80 / B20 - 36.000 h.
Light temperature	3000 K
CRI	CRI >80

LIGHTING DETAILS

emission	Direct / Indirect
optic	40° + 40°

PHOTOMETRIC

