

Shock

EST51011 - 12 W - Ceiling mounted - Downlight / 3000 K / CRI >80


DESCRIPTION

The Shock series is particularly suitable for the lighting of paths, facades and outdoor covered areas. Made of die-cast aluminum, the luminaires is available in three different versions: ceiling downlighter, single and dual emission wall mounting; all versions can be installed quickly thanks to the fixing base that can be separated from the body, and are complete with die-cast front ring with transparent safety tempered glass. Shock is equipped with drivers in the body of the fixture, high efficiency CoB Led and roto-symmetrical 40° optic with curved facets. It is available in matt white and matt grey colour.



PRODUCTS CHARACTERISTICS

installation type	Wall and Ceiling Mounted
material	Aluminum
Color	Gray
Power	12 W
Lumen output - Full emission	800 lm
net weight	0,70 kg.

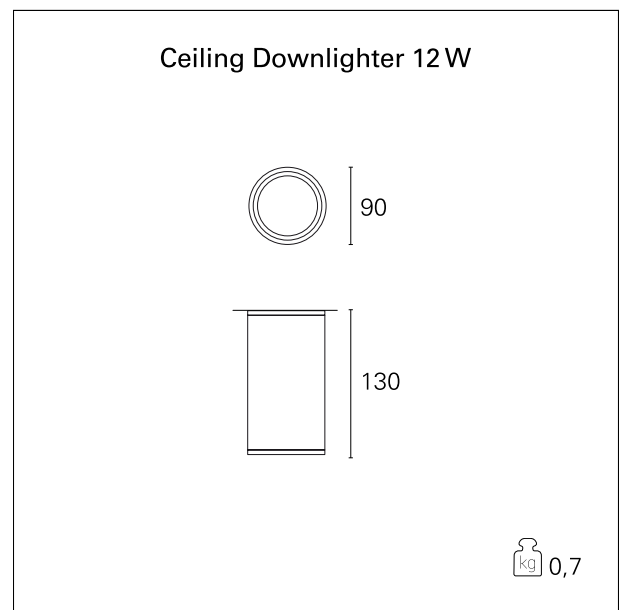

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
driver	On:Off
Insulation class	Class I

MECHANICAL CHARACTERISTICS

product IP rate	IP65
IK	IK06

Shock

EST51011 - 12 W - Ceiling mounted - Downlight / 3000 K / CRI >80

LED SOURCE DETAILS

led source type	CoB Led
Light source connection	LED
Service lifetime	L80 / B20 - 36.000 h.
Light temperature	3000 K
CRI	CRI >80

LIGHTING DETAILS

emission	Direct
optic	40°

PHOTOMETRIC

