

Skin

EST54001 - 5 W - Big 330 x 65 mm. / 3000 K / CRI >80


DESCRIPTION

Skin is a recessed wall and floor luminaire designed to illuminate paths and external areas; available in two sizes and in two different color temperatures, Skin is equipped with SMD LED and is complete with driver; it is installed thanks to its flush-mounted box, supplied and already drilled for the passage of cables. Skin is characterized by the front made of AISI 316L stainless steel, particularly resistant to atmospheric agents and to high concentrations of iodine and chlorine in the air, as typically occurs in areas close to the sea. The flush coupling between the glass and the steel frame reduces the deposit of earth and dust on the front; the internal satin finish of the glass allows to obtain softly diffused light effects, avoiding any form of glare regardless of the viewing angle of the observer.



PRODUCTS CHARACTERISTICS

installation type	Wall Recessed
material	AISI 316L stainless steel
Color	Steel
Power	5 W
Lumen output - Full emission	95 lm
Dimensions	330 x 65 mm.
net weight	1,37 kg.

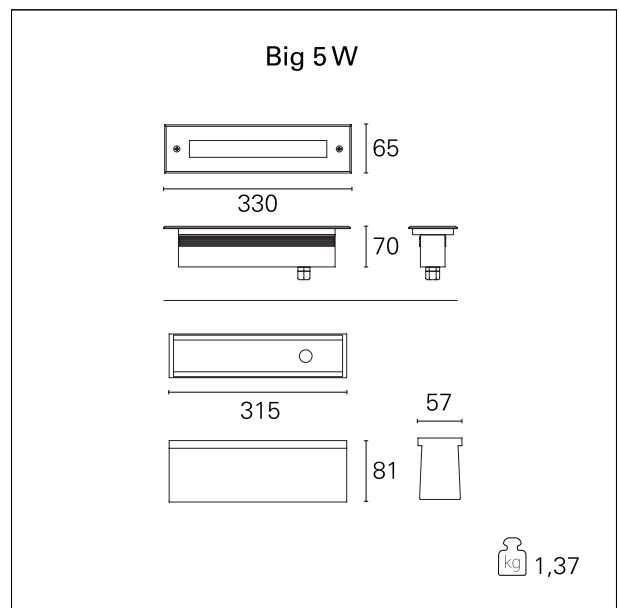

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
driver	On:Off
Insulation class	Class I

MECHANICAL CHARACTERISTICS

product IP rate	IP67
IK	IK09

Skin

EST54001 - 5 W - Big 330 x 65 mm. / 3000 K / CRI >80

LED SOURCE DETAILS

led source type	SMD Led
Service lifetime	L80 / B20 - 36.000 h.
Light temperature	3000 K
CRI	CRI >80

LIGHTING DETAILS

emission	Direct
optic	120°

PHOTOMETRIC

