

### Miniled

**EST58104** - 1 W - Rounded / 3000 K / CRI >80


#### DESCRIPTION

**Miniled is a floor and wall recessed product 1W/ 350 mA; IP67 rating. Aluminium body with front ring in AISI 316 steel, round or square (also available in matt white). Transparent protection glass. 3 optics available. Equipped with PBT housing. Driver not included.**



#### PRODUCTS CHARACTERISTICS

|                              |  |
|------------------------------|--|
| installation type            | <b>Small Ingrounds</b>                     |
| material                     | <b>Aluminum / AISI 304 stainless steel</b> |
| Color                        | <b>Steel</b>                               |
| Power                        | <b>1 W</b>                                 |
| Lumen output - Full emission | <b>110 lm</b>                              |
| Efficacy                     | <b>110 lm/W</b>                            |
| Diameter                     | <b>Ø 27 mm.</b>                            |
| net weight                   | <b>0,06 kg.</b>                            |

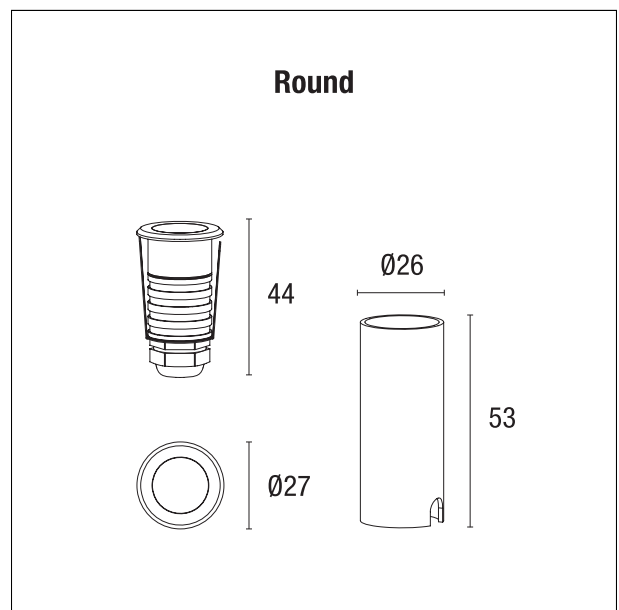

#### ELECTRICAL CHARACTERISTICS

|                  |                  |
|------------------|------------------|
| feeding          | <b>350 mA CC</b> |
| Insulation class | <b>Class III</b> |

#### MECHANICAL CHARACTERISTICS

|                 |             |
|-----------------|-------------|
| product IP rate | <b>IP67</b> |
|-----------------|-------------|

### Miniled

**EST58104** - 1 W - Rounded / 3000 K / CRI >80

#### HOLE RECESS DIMENSIONS

hole recess diameter **ø 23 mm.**

#### LED SOURCE DETAILS

|                   |                   |
|-------------------|-------------------|
| led source type   | <b>Power Led</b>  |
| LED current       | <b>350 mA</b>     |
| Light temperature | <b>3000 K</b>     |
| CRI               | <b>CRI &gt;80</b> |

#### LIGHTING DETAILS

|                 |                  |
|-----------------|------------------|
| emission        | <b>Direct</b>    |
| luminous effect | <b>Projected</b> |
| optic           | <b>20°</b>       |

#### PHOTOMETRIC

