

Flavin

EST79400 - 10 W / 3000 K / CRI >80


DESCRIPTION

Flavin can be installed on the wall or on the ceiling for the lighting of outdoor environments such as porches, small balconies, facades and condominium areas with perfectly diffused light. The body of the base, made of die-cast aluminum, is fixed directly to the wall or ceiling; the led source is protected by a double opal screen to obtain maximum light diffusion. Flavin is equipped with 10 W SMD LEDs and powered by mains voltage and does not require a remote driver.



PRODUCTS CHARACTERISTICS

installation type	Wall and Ceiling Mounted
material	Aluminum die casting
Color	White
Power	10 W
Lumen output - Full emission	550 lm
Dimensions	137 x 137 mm
net weight	0,61 kg

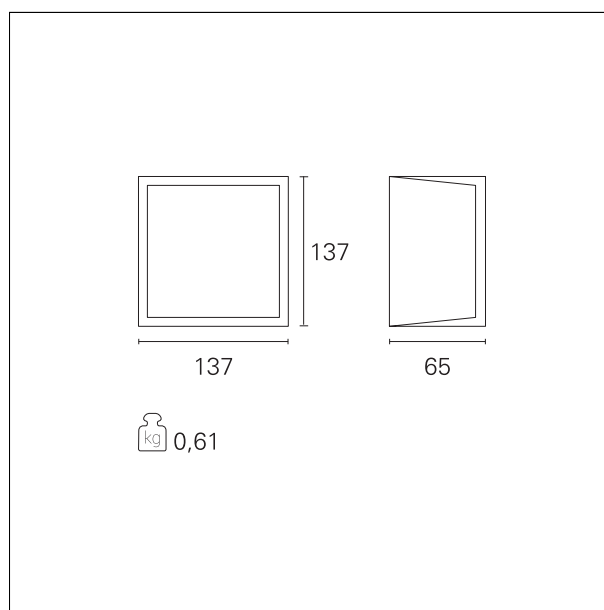

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
driver	On:Off
Insulation class	Class I

MECHANICAL CHARACTERISTICS

product IP rate	IP65
IK	IK10

Flavin

EST79400 - 10 W / 3000 K / CRI >80

LED SOURCE DETAILS

led source type	SMD Led
Light source connection	LED
Light temperature	3000 K
CRI	CRI >80

LIGHTING DETAILS

emission optic	Diffuser
	160°

PHOTOMETRIC

