

Boxer

EST81202 - 2x 7 W - Uplight / Downlight / 3000 K / CRI >80


DESCRIPTION

Boxer is an outdoor fixture that can be installed on the wall to obtain grazing facades light effects; cubic in shape, it is extremely minimal and it suits to any architectural style by camouflaging itself on the facade. Made of die-cast aluminum, Boxer is available in two different configurations for mono or dual emission; it is equipped with frame kit, supplied as accessories included, to be inserted inside the optical compartment to shape the emission beam, thus obtaining particular grazing light effects. Boxer is available in the finishes matt grey and matt white; it is equipped with driver and CoB led, and can be easily installed thanks to the fixing plate that can be separated from the body.



PRODUCTS CHARACTERISTICS

installation type	Wall Mounting
material	Aluminum
Color	White
Power	2x 7 W
Lumen output - Full emission	1240 lm

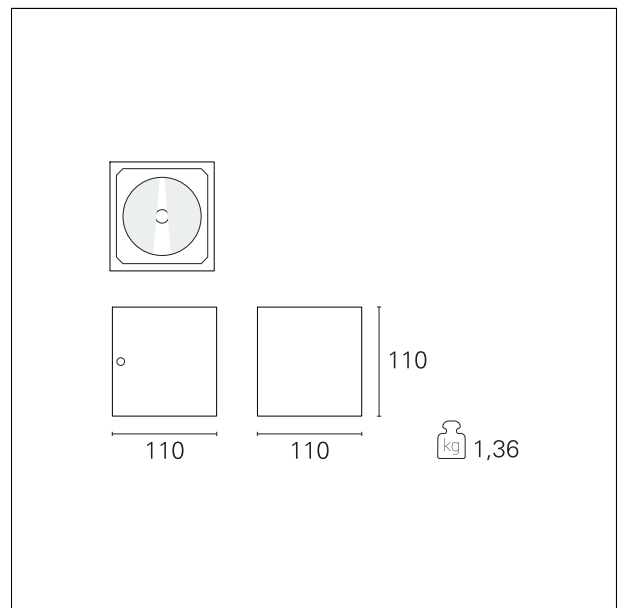

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
driver	On:Off

MECHANICAL CHARACTERISTICS

product IP rate	IP54
IK	IK05

Boxer

EST81202 - 2x 7 W - Uplight / Downlight / 3000 K / CRI >80

LED SOURCE DETAILS

led source type	CoB Led
Light source connection	LED
Service lifetime	L80 / B20 - 50.000 h.
Light temperature	3000 K
CRI	CRI >80

LIGHTING DETAILS

emission	Direct / Indirect
optic	2x 110° - 22°

PHOTOMETRIC

