

Dado

FAC02131 - 6 W / 3000 K / CRI >80


DESCRIPTION

Wall or ceiling luminaire. Die-cast aluminium body. Frosted internal diffuser and transparent external methacrylate shade . High efficiency LED light source. For diffused light effects. Electronic driver integrated in the fixture. IP65 protection.



PRODUCTS CHARACTERISTICS

installation type	Wall Mounting
material	Aluminum die casting
Finish	Painted
Color	Anthracite
Power	6 W
Lumen output - Full emission	390 lm
net weight	0,90 kg.

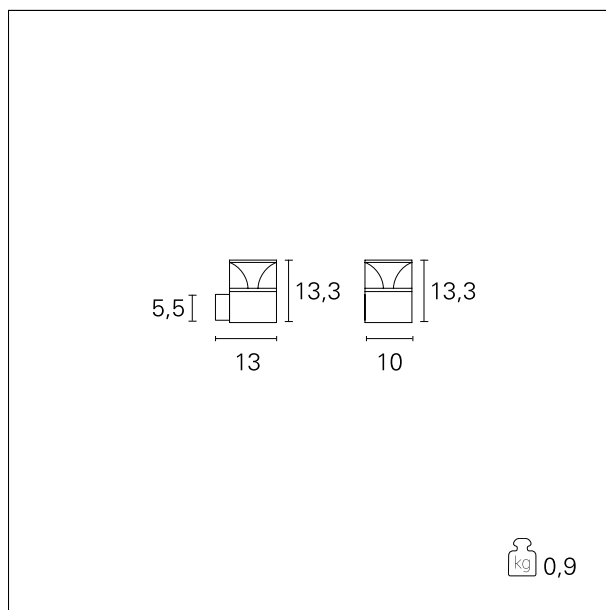

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
driver	On:Off
Insulation class	Class I

MECHANICAL CHARACTERISTICS

product IP rate	IP65
IK	IK06

Dado

FAC02131 - 6 W / 3000 K / CRI >80

LED SOURCE DETAILS

led source type	SMD Led
Light source connection	LED
Light temperature	3000 K
CRI	CRI >80

LIGHTING DETAILS

emission	Direct
optic	Diffuser

PHOTOMETRIC

