

Focus Mini

FO-MAA32W - 4000 K - Optics 24° / 3 W / 4000 K / CRI >90

DESCRIPTION

The recessed downlight Focus range are designed to be used for accent lighting in small and medium spaces. Small in size but great performance, they are proposed in different sizes and powers. The choice between MICRO, MINI, MEDIUM and BIG allows the use of the appliance that best suits your needs. Our range include fix and adjustable versions. All models can be configured by color choice, product color and management (On/Off, DALI, Push, Phase Cut). Optics with different beam angle can be selected. LED is placed in the back position and characterizes the product for remarkable cut off. The product is made of aluminium turning and presents simplified installation. Different colors available in the Focus range: in addition to black and white you can choose tobacco, sand and silver. The driver is separate from the product, our proposal include several power supply in reason of the installation.




Switch

On÷Off

PRODUCTS CHARACTERISTICS

installation type	Recessed Spotlights
material	Aluminum
Color	White
Power	3 W
Lumen output - Full emission	180 lm
Efficacy	60 lm/W
Diameter	ø 28 mm.
Dimensions	h 45 mm.
net weight	0,049 kg.

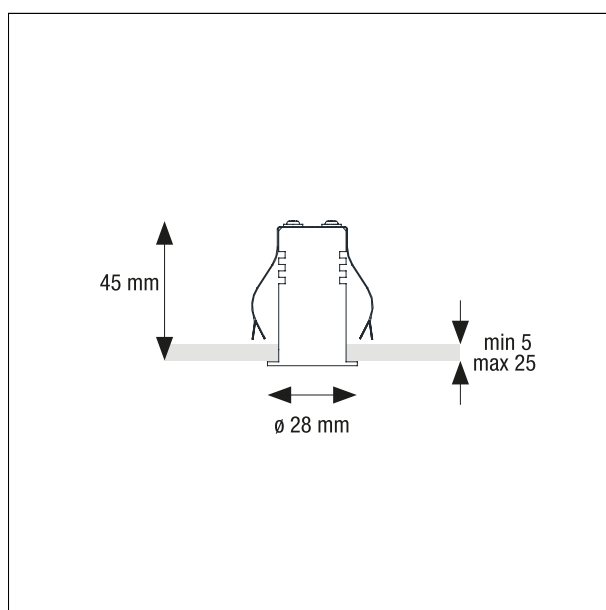

ELECTRICAL CHARACTERISTICS

driver

On÷Off

MECHANICAL CHARACTERISTICS

product IP rate

IP20

Focus Mini

FO-MAA32W - 4000 K - Optics 24° / 3 W / 4000 K / CRI >90

HOLE RECESS DIMENSIONS

hole recess diameter **ø 25 mm.**

LED SOURCE DETAILS

led source type	Power Led
Photobiological risk	RG 1 Low risk (IEC 62471)
LED current	700 mA
Light temperature	4000 K
CRI	CRI >90
SDCM	< 3

DRIVER CHARACTERISTICS

driver **On÷Off**

LIGHTING DETAILS

luminous effect	spot
optic	24°
Beam angle - direct	24°

PHOTOMETRIC

