

Royal

GB-SH2Z - ø 960 mm. - 42+42W - 5240 lm / 42+42 W / 3000 K / CRI > 80


DESCRIPTION

Royal adds versatility in fixture selection. While maintaining a compact profile, it is designed to offer dual emission: direct and indirect. It is perfectly suited for installations where a strong lighting effect toward the ceiling is desired. Its construction quality and use of advanced technologies ensure excellent performance.



PRODUCTS CHARACTERISTICS

installation type	Pendant
material	aluminum
Finish	Painted
Colour	Bronze
Power	42+42 W
Lumen output - Full emission	5240 lm
Diameter	ø 960 mm.
net weight	4,2 kg

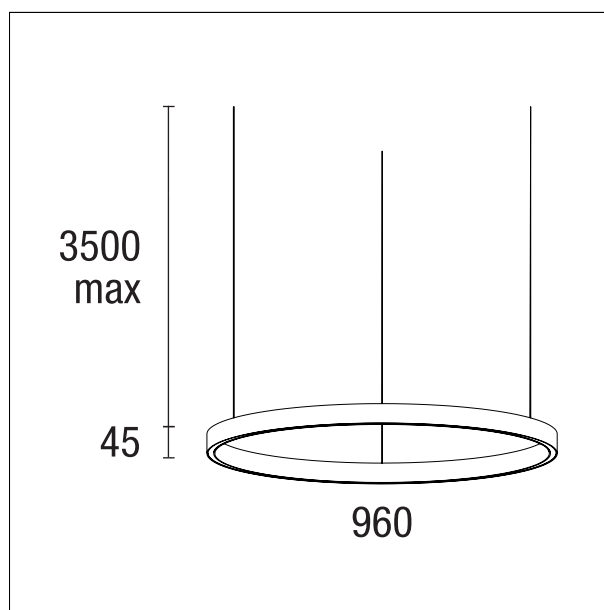

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
Insulation class	Class III

MECHANICAL CHARACTERISTICS

product IP rate	IP20
-----------------	-------------

Royal

GB-SH2Z - ø 960 mm. - 42+42W - 5240 lm / 42+42 W / 3000 K / CRI > 80

LED SOURCE DETAILS

led source type	SMD Led
Light temperature	3000 K
CRI	CRI > 80

DRIVER CHARACTERISTICS

Lifetime	L80/B20 50.000 h.
----------	--------------------------


LIGHTING DETAILS

emission	Uplight / Downlight
optic	Diffuser

COMPONENTS

Rosone Semi-incasso 220-240Vac; n. 2 alimentatore incluso


GSS0422 + ■ ▲



		* Code to complete	
Colour	■	Control	▲
nero	B	DALI	DA
bianco	W	On/Off	NF
		Push	PU

Rosone circolare 220-240Vac; alimentatore incluso

GSS0122 + ■ ▲




		* Code to complete	
Colour	■	Control	▲
bronz	Z	DALI	DA
		On/Off	NF
		Push	PU

Royal

GB-SH2Z - ø 960 mm. - 42+42W - 5240 lm / 42+42 W / 3000 K / CRI > 80

Rosone lineare 220-240Vac; alimentatore incluso

GSS0322 + ■ ▲

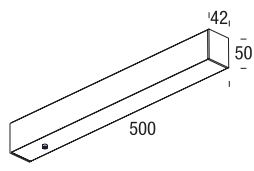

Colour
bronzo

Z

Control
DALI
On/Off
Push

* Code to complete

▲
DA
NF
PU