

Dado

GRD01131 - 6 W / 3000 K / CRI >80

DESCRIPTION


The bollards of Dado series are particularly suitable for the lighting of large outdoor areas, such as parks, gardens, pedestrian walkways and rest areas. Dado illuminates the whole surrounding area thanks to its particular optical module that combines different light reflections to obtain particularly soft and uniform lighting. Complete with drivers and wired with power cable and IP68 plug, the bollards of the Dado series are made of extruded aluminum and are equipped with a specific stand alone mounting plate that facilitates installation. The version for wall mounting completes the range allowing to create systems with different types of coordinated appliances.



Switch **On:Off**

PRODUCTS CHARACTERISTICS

installation type	Bollard
material	Aluminum
Finish	Painted
Color	Anthracite
Power	6 W
Lumen output - Full emission	390 lm
Efficacy	65 lm/W
Dimensions	h 25 cm.
net weight	1,1 kg.

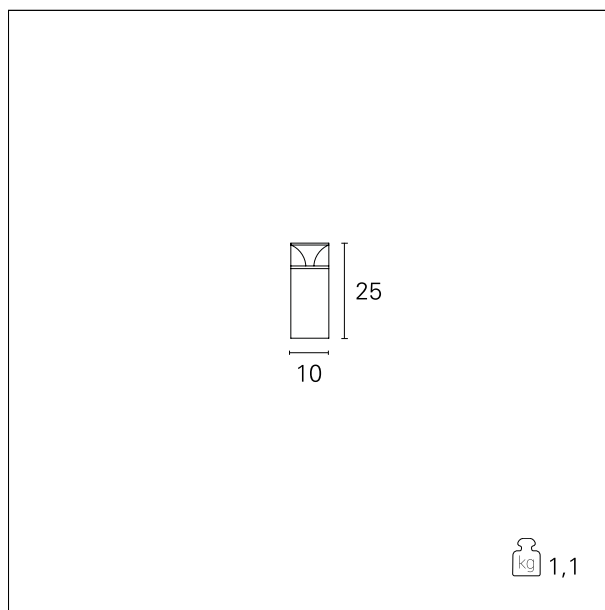

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
driver	On:Off
Insulation class	Class I

MECHANICAL CHARACTERISTICS

product IP rate	IP65
-----------------	-------------

Dado

GRD01131 - 6 W / 3000 K / CRI >80

IK

IK06

LED SOURCE DETAILS

led source type	SMD Led
Light source connection	LED
Service lifetime	L80 / B50 - 30.000 h
Light temperature	3000 K
CRI	CRI >80

LIGHTING DETAILS

optic **360° + 90°**

PHOTOMETRIC

