

Billy

GRD02130 - 7 W / 3000 K / CRI >80


DESCRIPTION

The product is designed for outdoor lighting applications such as gardens, pedestrian pathways, and driveways. The spotlight, featuring a 25° optic, ensures excellent light output and precise emissions, making it an ideal solution for accent lighting and creating scenic effects. There are two models available, with different heights and one or two light sources. The light emission can be adjusted vertically and horizontally. All fixtures come complete with drivers and are pre-wired with an IP68-rated power cable and connector. They are known for their compactness and robustness, constructed from extruded aluminum, and include a specific independent mounting plate that simplifies installation on a concrete plinth.



PRODUCTS CHARACTERISTICS

installation type	bollard
Color	antracite
Power	7 W
Lumen output - Full emission	275 lm
Efficacy	39 lm/W
Dimensions	h 70 cm.
net weight	1,9 kg

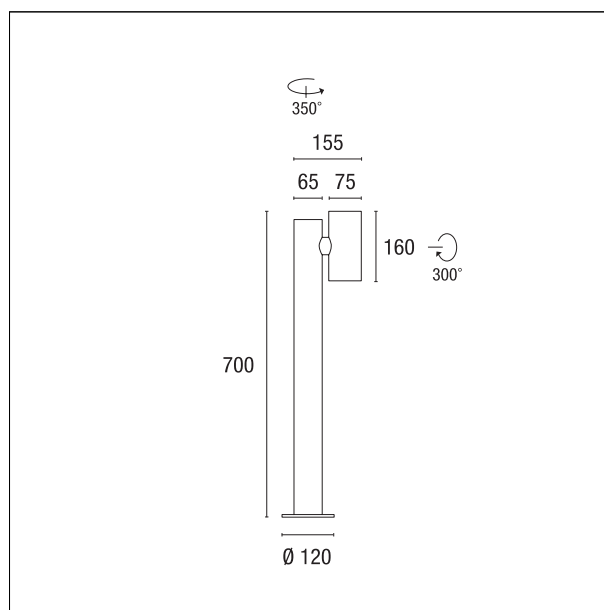

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
driver	On÷Off
Insulation class	Classe I

MECHANICAL CHARACTERISTICS

product IP rate	IP65
IK	IK06

Billy

GRD02130 - 7 W / 3000 K / CRI >80

LED SOURCE DETAILS

led source type	CoB LED
Light source connection	LED
Service lifetime	L80/B50 - 36.000 h.
Light temperature	3000 K
CRI	CRI >80

LIGHTING DETAILS

optic	25°
-------	------------

PHOTOMETRIC

