

Kart

GRF03111DM - 38 W / 3000 K / CRI > 80

DESCRIPTION


Kart is made of matt white painted aluminium and is equipped with a PMMA diffusing screen which allows to obtain soft and diffused light effects. The curvature of the aluminium body perfectly matches the curvature of the internal PMMA screen to create a single shape with a soft and contemporary design. The high efficiency SMD LED source is powered by the driver integrated in the fixture and can be On/Off or dimmable multifunction 1...10 V, Push, DALI controlled. Kart is available in different sizes and powers and goes well with the suspension versions. Available in dimmable "wireless signal" Bluetooth versions for Pan Digital or Casambi mesh network.



Switch 1...10 / Push / DALI

PRODUCTS CHARACTERISTICS

installation type	Plafone
material	Alluminio
Finish	Verniciato
Color	Bianco
Power	38 W
Lumen output - Direct emission	2290 lm
Lumen output - Full emission	2290 lm
Efficacy	\
Dimensions	47,5 x 47,5 cm.
net weight	2,6 kg.

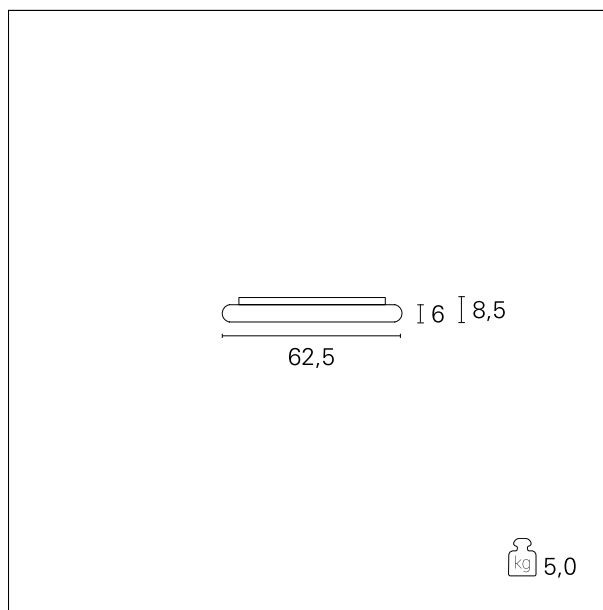

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
driver	1...10 / Push / DALI
Insulation class	Classe I

MECHANICAL CHARACTERISTICS

product IP rate	IP20
-----------------	-------------


Kart

GRF03111DM - 38 W / 3000 K / CRI > 80

ENERGY CLASSIFICATION



This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

LED SOURCE DETAILS

led source type	SMD Led
Light source connection	LED
Energy class	LED
Light temperature	3000 K
CRI	CRI > 80
SDCM	\

DRIVER CHARACTERISTICS

driver	1...10 / Push / DALI
--------	-----------------------------


LIGHTING DETAILS

emission	Diretta
optic	130°
UGR	\

Kart

GRF03111DM - 38 W / 3000 K / CRI > 80

PHOTOMETRIC

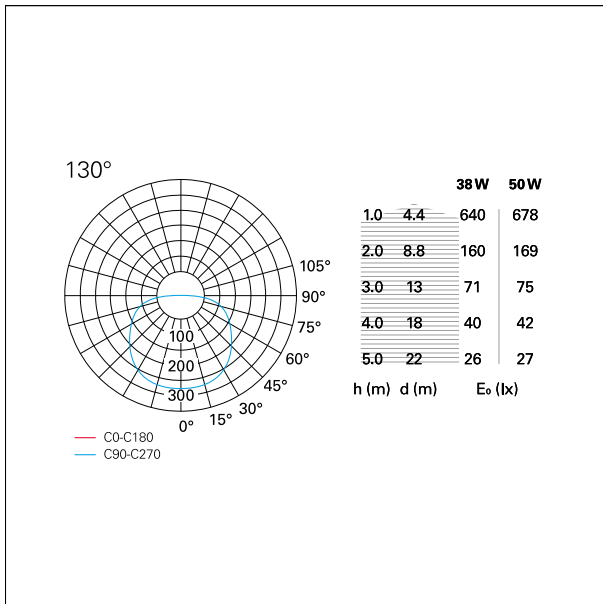

WARRANTY

period

2 years