



Bike

GRF04311PD - 120 W / 3000 K / CRI > 80

DESCRIPTION


Bike is made of matt white painted aluminium and is complete with lower PMMA screen; it allows to create soft and diffused down light effects and is particularly suitable for general lighting of medium or large environments. Its ring shape allows you to see the ceiling on the inside of the appliance. The high efficiency SMD LED source is powered by the driver integrated in the fixture which can be On/Off or dimmable multifunction 1...10 V, Push, DALI controlled. Bike is available in different sizes and powers and can be combined with the corresponding suspension versions. Available in dimmable "wireless signal" Bluetooth versions for Pan Digital or Casambi mesh network.



Switch Pan Digital

PRODUCTS CHARACTERISTICS

installation type **Plafone Alluminio** material Verniciato Finish Color **Bianco** Power 120 W 7200 Im Lumen output - Direct emission Lumen output - Full emission 7200 lm Efficacy Diameter ø 110 cm. 11,7 kg. net weight

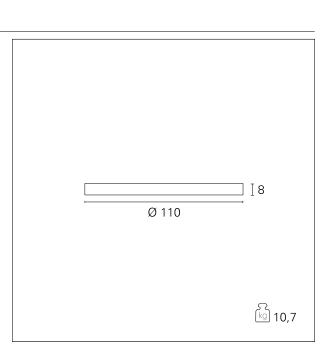

ELECTRICAL CHARACTERISTICS

feeding 220÷240 V
driver Pan Digital
Insulation class Classe I

MECHANICAL CHARACTERISTICS

product IP rate IP20

Pan International srl Via G. Michelucci, 1 50028 Tavarnelle Val di Pesa Firenze Italy Tel: +39 (0)55 80 59 336/7 Fax: +39 (0)55 80 59 338 panint@panint.it www.panint.it This datasheet is property of Pan International Srl. All rights reserved. We reserve the right to make technical changes without notice.



Datasheet

Bike

GRF04311PD - 120 W / 3000 K / CRI > 80

ENERGY CLASSIFICATION



contains built-in LED lamps.



The lamps cannot be changed

LED SOURCE DETAILS

led source type Light source connection Energy class Light temperature CRI

SDCM

SMD Led LED LED 3000 K CRI > 80

DRIVER CHARACTERISTICS

Pan Digital driver

LIGHTING DETAILS

Diretta emission 100° optic **UGR**






Bike

GRF04311PD - 120 W / 3000 K / CRI > 80

PHOTOMETRIC

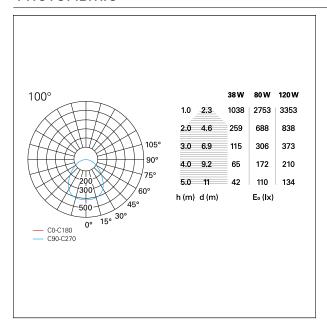

WARRANTY

period 2 years