



# Penny

**GRF05311PD** - 195 W / 3000 K / CRI > 80

#### **DESCRIPTION**

Penny is aluminium ceiling mounted luminaire in matt white painted color; it is characterized by its large PMMA lower screen which lights up perfectly evenly; by using Penny soft and diffused down light effects are obtained with emissions up to 12700 lumens in the larger diameter version; Penny is therefore particularly suitable for illuminating large rooms with uniform and perfectly distributed light without harsh shadows. Equipped with high efficiency SMD LED sources, Penny is complete with drivers integrated in the body of the fixture and is available with On/Off control or dimmable multifunction 1...10 V, Push, DALI. Penny is available in different sizes and powers and can be combined with the corresponding suspension versions. Available in dimmable "wireless signal" Bluetooth versions for Pan Digital or Casambi mesh network.

Pan Digital



# Switch PRODUCTS CHARACTERISTICS

installation type Plafone
material Alluminio
Finish Verniciato
Color Bianco
Power 195 W
Lumen output - Direct emission 12675 Im
Lumen output - Full emission 12675 Im
Efficacy


Efficacy

Diameter

net weight

\text{120 cm.}

16,8 kg.

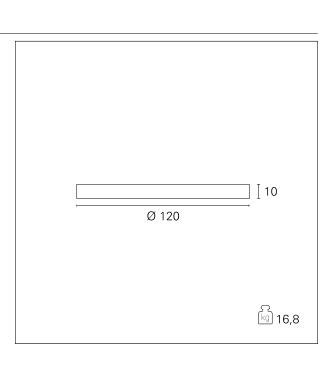

#### **ELECTRICAL CHARACTERISTICS**

feeding 220÷240 V driver Pan Digital Insulation class Classe I

#### MECHANICAL CHARACTERISTICS

product IP rate IP20

Pan International srl Via G. Michelucci, 1 50028 Tavarnelle Val di Pesa Firenze Italy Tel: +39 (0)55 80 59 336/7 Fax: +39 (0)55 80 59 338 panint@panint.it www.panint.it This datasheet is property of Pan International Srl. All rights reserved. We reserve the right to make technical changes without notice.



**Datasheet** 

# Penny

**GRF05311PD** - 195 W / 3000 K / CRI > 80

#### **ENERGY CLASSIFICATION**





The lamps cannot be changed in the luminaire.

#### LED SOURCE DETAILS

led source type SMD Led
Light source connection LED
Energy class LED
Light temperature 3000 K
CRI CRI > 80
SDCM

## **DRIVER CHARACTERISTICS**

driver Pan Digital

## LIGHTING DETAILS

emission
Optic
UGR

Diretta

110°

V






# Penny

**GRF05311PD** - 195 W / 3000 K / CRI > 80

## **PHOTOMETRIC**



# WARRANTY

period 2 years