



Penny

GRF05311 - 195 W / 3000 K / CRI > 80

DESCRIPTION


Penny is aluminium ceiling mounted luminaire in matt white painted color; it is characterized by its large PMMA lower screen which lights up perfectly evenly; by using Penny soft and diffused down light effects are obtained with emissions up to 12700 lumens in the larger diameter version; Penny is therefore particularly suitable for illuminating large rooms with uniform and perfectly distributed light without harsh shadows. Equipped with high efficiency SMD LED sources, Penny is complete with drivers integrated in the body of the fixture and is available with On/Off control or dimmable multifunction 1...10 V, Push, DALI. Penny is available in different sizes and powers and can be combined with the corresponding suspension versions. Available in dimmable "wireless signal" Bluetooth versions for Pan Digital or Casambi mesh network.



Switch On / Off

PRODUCTS CHARACTERISTICS

installation type ceiling lamps Aluminum material **Painted** Finish Color **Bianco** Power 195 W 12675 lm Lumen output - Direct emission Lumen output - Full emission 12675 lm Efficacy Diameter ø 120 cm. 16,8 kg. net weight

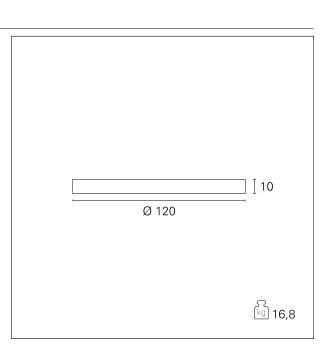

ELECTRICAL CHARACTERISTICS

feeding 220÷240 V driver On / Off Class I

MECHANICAL CHARACTERISTICS

product IP rate IP20

Pan International srl Via G. Michelucci, 1 50028 Tavarnelle Val di Pesa Firenze Italy Tel: +39 (0)55 80 59 336/7 Fax: +39 (0)55 80 59 338 panint@panint.it www.panint.it This datasheet is property of Pan International Srl. All rights reserved. We reserve the right to make technical changes without notice.



Datasheet

Penny

GRF05311 - 195 W / 3000 K / CRI > 80

ENERGY CLASSIFICATION



contains built-in LED lamps.



The lamps cannot be changed

LED SOURCE DETAILS

led source type Light source connection Energy class Light temperature CRI **SDCM**

SMD Led LED LED 3000 K CRI > 80

DRIVER CHARACTERISTICS

On / Off driver

LIGHTING DETAILS

Direct emission 110° optic **UGR**






Penny

GRF05311 - 195 W / 3000 K / CRI > 80

PHOTOMETRIC



WARRANTY

period 2 years