

### Play

**GRF11211DM** - ø 61 cm. - 62 W - 3720 lm / 3000 K / CRI > 80

#### DESCRIPTION


Play is an aluminium ceiling mounted luminaire in matt white or matt black color painted, equipped with a diffusing opal PMMA screen. Thanks to the SMD LED sources integrated in the body of the device, the lower screen lights up perfectly evenly; Play allows to obtain soft and diffused down light effects and is therefore particularly suitable for illuminating indoor ambients with uniform light, perfectly distributed and free of harsh shadows. Play is complete with drivers integrated into the body of the device and is available in versions OnOff controlled or dimmable 1 ... 10V, Push, DALI controlled. The range is completed by versions for permanent emergency light with 1 hour autonomy, ignition time 0.5 sec. and recharging time 24 h.



Switch **1...10 / Push / DALI**

#### PRODUCTS CHARACTERISTICS

installation type	<b>ceiling lamps</b>
material	<b>Aluminum</b>
Finish	<b>Painted</b>
Color	<b>White</b>
Power	<b>62 W</b>
Lumen output - Full emission	<b>3720 lm</b>
Diameter	<b>ø 61 cm.</b>
net weight	<b>4,8 kg.</b>

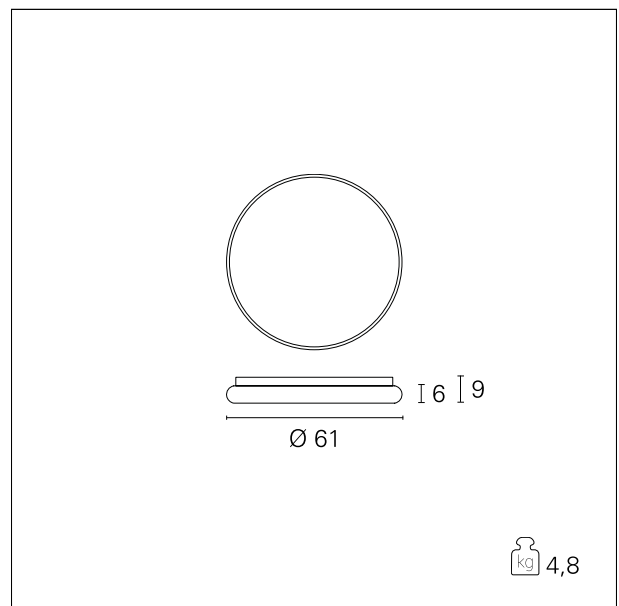

#### ELECTRICAL CHARACTERISTICS

feeding	<b>220÷240 V</b>
driver	<b>1...10 / Push / DALI</b>
Insulation class	<b>Class I</b>

#### MECHANICAL CHARACTERISTICS

product IP rate	<b>IP20</b>
-----------------	-------------

### Play

GRF11211DM - ø 61 cm. - 62 W - 3720 lm / 3000 K / CRI > 80

#### ENERGY CLASSIFICATION



This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

#### LED SOURCE DETAILS

led source type	<b>SMD Led</b>
Light source connection	<b>LED</b>
Light temperature	<b>3000 K</b>
CRI	<b>CRI &gt; 80</b>

#### DRIVER CHARACTERISTICS

driver	<b>1...10 / Push / DALI</b>
--------	-----------------------------

#### LIGHTING DETAILS

luminous effect	<b>diffused light</b>
optic	<b>110°</b>

#### PHOTOMETRIC

### Play

GRF11211DM - ø 61 cm. - 62 W - 3720 lm / 3000 K / CRI > 80

