

Play

GRF11211H1 - ø 61 cm. - 62 W - 3720 lm / 3000 K / CRI > 80

DESCRIPTION

Play is an aluminium ceiling mounted luminaire in matt white or matt black color painted, equipped with a diffusing opal PMMA screen. Thanks to the SMD LED sources integrated in the body of the device, the lower screen lights up perfectly evenly; Play allows to obtain soft and diffused down light effects and is therefore particularly suitable for illuminating indoor ambients with uniform light, perfectly distributed and free of harsh shadows. Play is complete with drivers integrated into the body of the device and is available in versions OnOff controlled or dimmable 1 ... 10V, Push, DALI controlled. The range is completed by versions for permanent emergency light with 1 hour autonomy, ignition time 0.5 sec. and recharging time 24 h.




Switch

Emergency 1 h.

PRODUCTS CHARACTERISTICS

installation type
material
Finish
Color
Power
Lumen output - Full emission
Diameter
net weight

ceiling lamps
Aluminum
Painted
White
62 W
4760 lm
ø 61 cm.
4,8 kg.

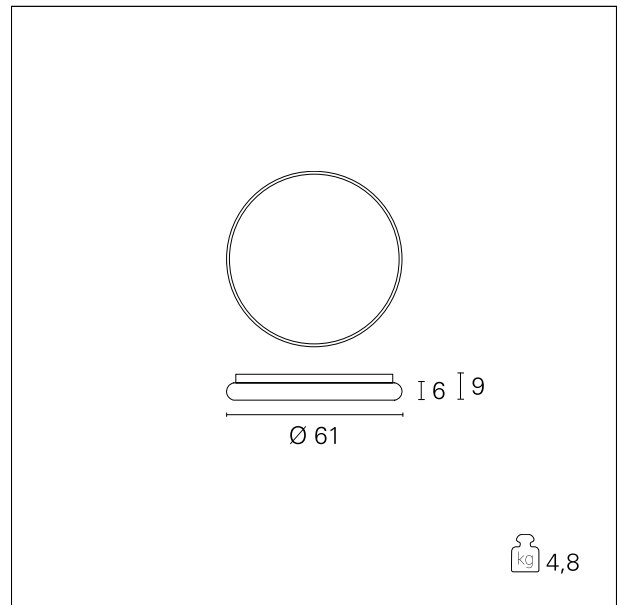

ELECTRICAL CHARACTERISTICS

feeding
driver
Insulation class

220÷240 V
Emergenza 1 h.
Class I

MECHANICAL CHARACTERISTICS

product IP rate

IP20

Play

GRF11211H1 - ø 61 cm. - 62 W - 3720 lm / 3000 K / CRI > 80

ENERGY CLASSIFICATION



This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

LED SOURCE DETAILS

| | |
|-------------------------|--------------------|
| led source type | SMD Led |
| Light source connection | LED |
| Light temperature | 3000 K |
| CRI | CRI > 80 |

DRIVER CHARACTERISTICS

| | |
|--------|-----------------------|
| driver | Emergenza 1 h. |
|--------|-----------------------|

LIGHTING DETAILS

| | |
|-----------------|-----------------------|
| luminous effect | diffused light |
| optic | 110° |

PHOTOMETRIC

Play

GRF11211H1 - \varnothing 61 cm. - 62 W - 3720 lm / 3000 K / CRI > 80

