

### Play

GRF11221H1 - ø 61 cm. - 62 W - 3720 lm / 3000 K / CRI > 80

#### DESCRIPTION

Play is an aluminium ceiling mounted luminaire in matt white or matt black color painted, equipped with a diffusing opal PMMA screen. Thanks to the SMD LED sources integrated in the body of the device, the lower screen lights up perfectly evenly; Play allows to obtain soft and diffused down light effects and is therefore particularly suitable for illuminating indoor ambients with uniform light, perfectly distributed and free of harsh shadows. Play is complete with drivers integrated into the body of the device and is available in versions OnOff controlled or dimmable 1 ... 10V, Push, DALI controlled. The range is completed by versions for permanent emergency light with 1 hour autonomy, ignition time 0.5 sec. and recharging time 24 h.




Switch

Emergency 1 h.

#### PRODUCTS CHARACTERISTICS

installation type  
material  
Finish  
Color  
Power  
Lumen output - Full emission  
Diameter  
net weight

ceiling lamps  
**Aluminum**  
**Painted**  
**Black**  
**62 W**  
**4760 lm**  
**ø 61 cm.**  
**4,8 kg.**

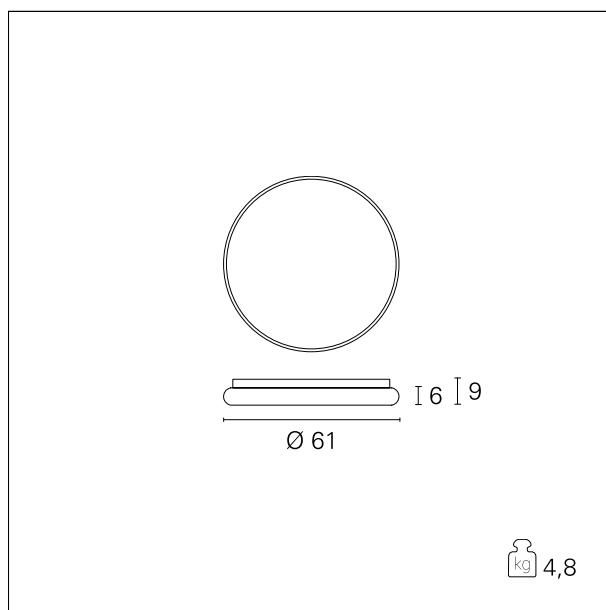

#### ELECTRICAL CHARACTERISTICS

feeding  
driver  
Insulation class

**220÷240 V**  
**Emergenza 1 h.**  
**Class I**

#### MECHANICAL CHARACTERISTICS

product IP rate

**IP20**


### Play

GRF11221H1 - ø 61 cm. - 62 W - 3720 lm / 3000 K / CRI > 80

#### ENERGY CLASSIFICATION



This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

#### LED SOURCE DETAILS

led source type	<b>SMD Led</b>
Light source connection	<b>LED</b>
Light temperature	<b>3000 K</b>
CRI	<b>CRI &gt; 80</b>

#### DRIVER CHARACTERISTICS

driver	<b>Emergenza 1 h.</b>
--------	-----------------------

#### LIGHTING DETAILS

luminous effect	<b>diffused light</b>
optic	<b>110°</b>

#### PHOTOMETRIC

### Play

GRF11221H1 -  $\varnothing$  61 cm. - 62 W - 3720 lm / 3000 K / CRI > 80

