

Cross


GRF13211 - ø 60 / 80 - 104 W - 7630 lm / 3000 K / CRI > 80

DESCRIPTION

Cross pendant in made in double white painted aluminium body. PMMA diffusing screen. High efficiency LED light source. For diffused light effects. Electronic driver integrated in the fixture. Height and inclination independently adjustable lighting rings. Other power gears available upon request and after checking feasibility. Steel suspension cables coated with transparent sheath adjustable in height with "grip lock" control. maximum length 350 cm.

Switch


On÷Off



PRODUCTS CHARACTERISTICS

installation type
material
Finish
Color
Power
Lumen output - Full emission
Diameter
net weight

High Bays
Aluminum
Painted
White
104 W
7630 lm
ø 60/80 cm.
5,2 kg.

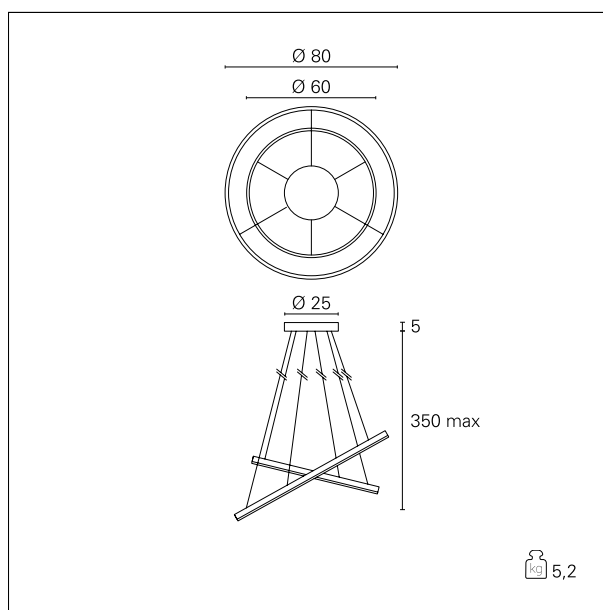

ELECTRICAL CHARACTERISTICS

feeding
driver
Insulation class

220÷240 V
On÷Off
Class I

MECHANICAL CHARACTERISTICS

product IP rate

IP20

Cross

GRF13211 - ø 60 / 80 - 104 W - 7630 lm / 3000 K / CRI > 80

LED SOURCE DETAILS

led source type	SMD Led
Light source connection	LED
Light temperature	3000 K
CRI	CRI > 80

DRIVER CHARACTERISTICS

driver	On÷Off
--------	---------------

LIGHTING DETAILS

emission	Downlight
optic	100°

PHOTOMETRIC

