

Urano

GRF15102 - 18 W / 3000 K / CRI > 80

DESCRIPTION

Uranus is a ceiling mounting or pendant luminaire; it is composed of a LED panel and a fabric shade complete with a translucent parchment screen. It allows to obtain extremely comfortable lighting effects thanks to the combination of the "edge led" type panel with the diffusing parchment. Urano can be installed as pendant up to 350 cm cables longer. thanks to four steel cables covered with transparent sheath, adjustable in height with self-locking "grip lock" system; the ceiling mounted version is complete with ceiling fixing brackets. Power cable in FEP + PVC transparent.




Switch

On / Off

PRODUCTS CHARACTERISTICS

installation type	ceiling lamps
material	Fabric
Color	Bordeaux
Power	18 W
Lumen output - Direct emission	1200 lm
Lumen output - Full emission	1200 lm
Efficacy	\
Dimensions	35 x 35 cm.
net weight	2,8 kg.

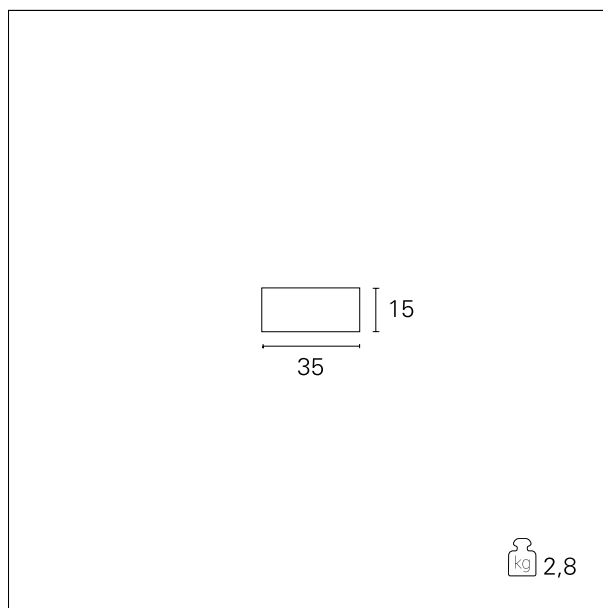

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
driver	On / Off
Insulation class	Class I

MECHANICAL CHARACTERISTICS

product IP rate	IP20
-----------------	-------------


Urano

GRF15102 - 18 W / 3000 K / CRI > 80

ENERGY CLASSIFICATION



This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

LED SOURCE DETAILS

led source type	LED
Light source connection	Panel
Energy class	LED
Light temperature	3000 K
CRI	CRI > 80
SDCM	\

DRIVER CHARACTERISTICS

driver	On / Off
--------	-----------------

LIGHTING DETAILS

emission	Direct
UGR	\

WARRANTY

period	2 years
--------	----------------