

### Urano

**GRF15106** - 35 x 35 cm. - 18 W - 1400 lm / 3000 K / CRI > 80

#### DESCRIPTION

Uranus is a ceiling mounting or pendant luminaire; it is composed of a LED panel and a fabric shade complete with a translucent parchment screen. It allows to obtain extremely comfortable lighting effects thanks to the combination of the "edge led" type panel with the diffusing parchment. Urano can be installed as pendant up to 350 cm cables longer. thanks to four steel cables covered with transparent sheath, adjustable in height with self-locking "grip lock" system; the ceiling mounted version is complete with ceiling fixing brackets. Power cable in FEP + PVC transparent.




Switch

On:Off

#### PRODUCTS CHARACTERISTICS

installation type	<b>High Bays</b>
material	<b>Fabric</b>
Color	<b>Black mesh fabric</b>
Power	<b>18 W</b>
Lumen output - Full emission	<b>1100 lm</b>
Dimensions	<b>35 x 35 cm.</b>
net weight	<b>2,8 kg.</b>

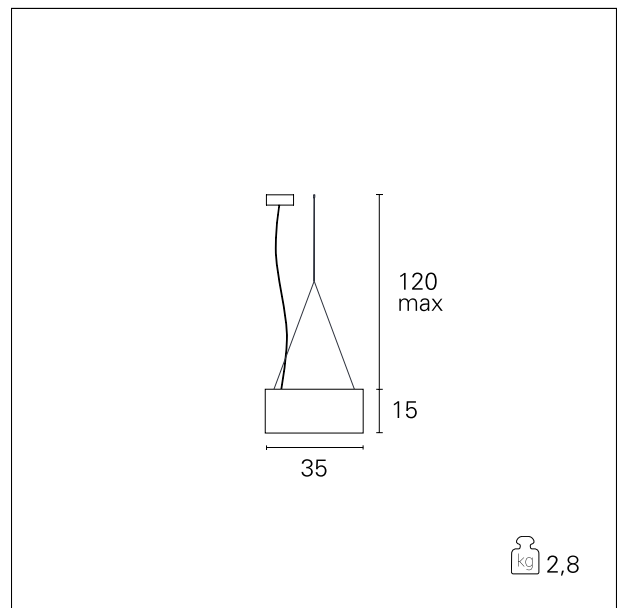

#### ELECTRICAL CHARACTERISTICS

feeding	<b>220÷240 V</b>
driver	<b>On:Off</b>
Insulation class	<b>Class I</b>

#### MECHANICAL CHARACTERISTICS

product IP rate	<b>IP20</b>
-----------------	-------------

### Urano

**GRF15106** - 35 x 35 cm. - 18 W - 1400 lm / 3000 K / CRI > 80

#### LED SOURCE DETAILS

led source type	<b>LED</b>
Light source connection	<b>Panel</b>
Light temperature	<b>3000 K</b>
CRI	<b>CRI &gt; 80</b>

#### DRIVER CHARACTERISTICS

driver	<b>On+Off</b>
--------	---------------

#### LIGHTING DETAILS

emission	<b>Downlight</b>
----------	------------------