

Urano

GRF15203 - 36 W / 3000 K / CRI > 80

DESCRIPTION


Uranus is a ceiling mounting or pendant luminaire; it is composed of a LED panel and a fabric shade complete with a translucent parchment screen. It allows to obtain extremely comfortable lighting effects thanks to the combination of the "edge led" type panel with the diffusing parchment. Urano can be installed as pendant up to 350 cm cables longer. thanks to four steel cables covered with transparent sheath, adjustable in height with self-locking "grip lock" system; the ceiling mounted version is complete with ceiling fixing brackets. Power cable in FEP + PVC transparent.



Switch **On / Off**

PRODUCTS CHARACTERISTICS

installation type	ceiling lamps
material	Fabric
Color	Black mesh fabric
Power	36 W
Lumen output - Direct emission	1950 lm
Lumen output - Full emission	1950 lm
Efficacy	\
Dimensions	65 x 65 cm.
net weight	3,8 kg.

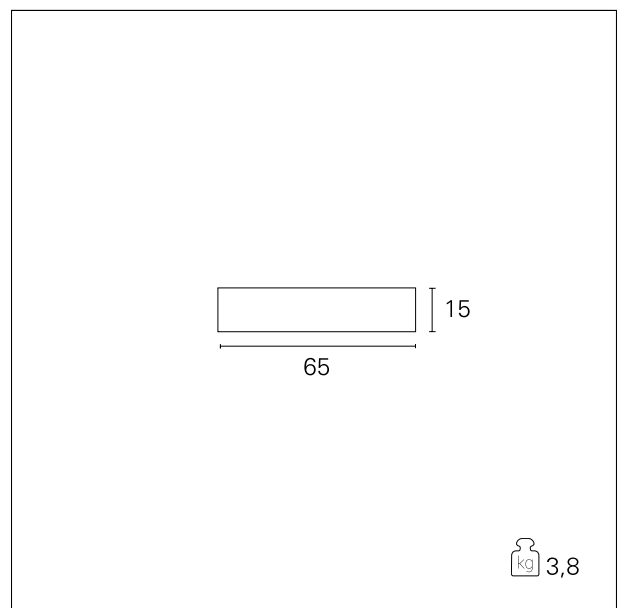

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
driver	On / Off
Insulation class	Class I

MECHANICAL CHARACTERISTICS

product IP rate	IP20
-----------------	-------------


Urano

GRF15203 - 36 W / 3000 K / CRI > 80

ENERGY CLASSIFICATION



This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

LED SOURCE DETAILS

led source type	LED
Light source connection	Panel
Energy class	LED
Light temperature	3000 K
CRI	CRI > 80
SDCM	\

DRIVER CHARACTERISTICS

driver	On / Off
--------	-----------------

LIGHTING DETAILS

emission	Direct
UGR	\

WARRANTY

period	2 years
--------	----------------