

Urano

GRF15206 - 65 x 65 cm. - 36 W - 2700 lm / 3000 K / CRI > 80

DESCRIPTION

Uranus is a ceiling mounting or pendant luminaire; it is composed of a LED panel and a fabric shade complete with a translucent parchment screen. It allows to obtain extremely comfortable lighting effects thanks to the combination of the "edge led" type panel with the diffusing parchment Urano can be installed as pendant up to 350 cm cables longer. thanks to four steel cables covered with transparent sheath, adjustable in height with self-locking "grip lock" system; the ceiling mounted version is complete with ceiling fixing brackets. Power cable in FEP + PVC transparent.




Switch

On:Off

PRODUCTS CHARACTERISTICS

installation type
material
Color
Power
Lumen output - Full emission
Dimensions
net weight

High Bays
Fabric
Black mesh fabric
36 W
1950 lm
65 x 65 cm.
3,8 kg.

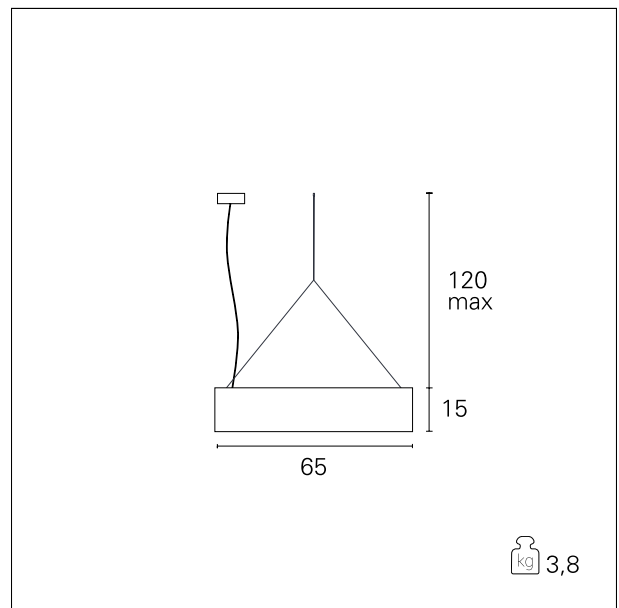

ELECTRICAL CHARACTERISTICS

feeding
driver
Insulation class

220÷240 V
On:Off
Class I

MECHANICAL CHARACTERISTICS

product IP rate

IP20

Urano

GRF15206 - 65 x 65 cm. - 36 W - 2700 lm / 3000 K / CRI > 80

LED SOURCE DETAILS

led source type	LED
Light source connection	Panel
Light temperature	3000 K
CRI	CRI > 80

DRIVER CHARACTERISTICS

driver	On+Off
--------	---------------

LIGHTING DETAILS

emission	Downlight
----------	------------------