


Infinity

GRF17111DM - ø 60 cm. - 50 W - 3600 lm / 3000 K / CRI > 80

DESCRIPTION

The crossed movements of the structure characterize the INFINITY models. An apparent formal simplicity becomes a prominent element in every installation. The lamp body is made of extruded aluminum, a polycarbonate screen with a special treatment maximizes light emission. Structure available in matt white or gold finish. The device is adjustable in height. The high efficiency driver is integrated in the ceiling rose. Multifunction dimmable versions with 1... 10V, Push, DALI control are available.

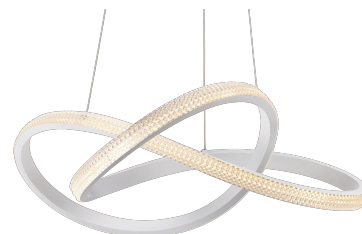


Switch

DALI / 1... 10V / Push

PRODUCTS CHARACTERISTICS

installation type
material
Finish
Color
Power
Lumen output - Full emission
Diameter
net weight

High Bays
Aluminum
Painted
White
50 W
3600 lm
ø 60 cm.
3,3 kg.

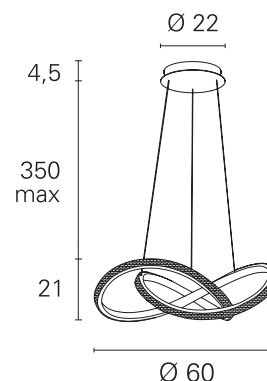

ELECTRICAL CHARACTERISTICS

feeding
driver
Insulation class

220÷240 V
DALI / 1... 10V / Push
Class I

MECHANICAL CHARACTERISTICS

product IP rate

IP20

Infinity

GRF17111DM - ø 60 cm. - 50 W - 3600 lm / 3000 K / CRI > 80

LED SOURCE DETAILS

led source type	SMD Led
Light temperature	3000 K
CRI	CRI > 80

DRIVER CHARACTERISTICS

driver	DALI / 1... 10V / Push
--------	-------------------------------

LIGHTING DETAILS

emission	Downlight
----------	------------------