


### Infinity

**GRF17113DM** - ø 80 cm. - 80 W - 5570 lm / 3000 K / CRI > 80

#### DESCRIPTION

The crossed movements of the structure characterize the INFINITY models. An apparent formal simplicity becomes a prominent element in every installation. The lamp body is made of extruded aluminum, a polycarbonate screen with a special treatment maximizes light emission. Structure available in matt white or gold finish. The device is adjustable in height. The high efficiency driver is integrated in the ceiling rose. Multifunction dimmable versions with 1... 10V, Push, DALI control are available.

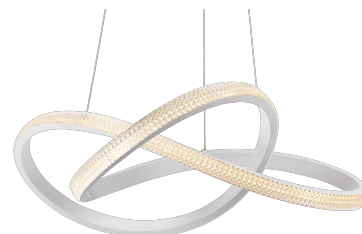


Switch

**DALI / 1... 10V / Push**

#### PRODUCTS CHARACTERISTICS

installation type  
material  
Finish  
Color  
Power  
Lumen output - Full emission  
Diameter  
net weight

**High Bays**  
**Aluminum**  
**Painted**  
**White**  
**80 W**  
**5570 lm**  
**ø 80 cm.**  
**4,3 kg.**

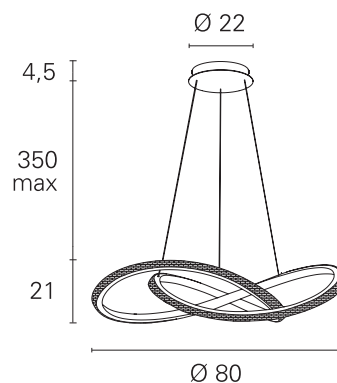

#### ELECTRICAL CHARACTERISTICS

feeding  
driver  
Insulation class

**220÷240 V**  
**DALI / 1... 10V / Push**  
**Class I**

#### MECHANICAL CHARACTERISTICS

product IP rate

**IP20**

### Infinity

**GRF17113DM** - ø 80 cm. - 80 W - 5570 lm / 3000 K / CRI > 80

#### LED SOURCE DETAILS

led source type	<b>SMD Led</b>
Light temperature	<b>3000 K</b>
CRI	<b>CRI &gt; 80</b>

#### DRIVER CHARACTERISTICS

driver	<b>DALI / 1... 10V / Push</b>
--------	-------------------------------

#### LIGHTING DETAILS

emission	<b>Downlight</b>
----------	------------------