

Plaster 7

INC10518 - 3 W / 3000 K / CRI >80

DESCRIPTION

Plaster recessed downlight with LED source set back. Product is complete with 220/230V driver. The downlight can be installed with extreme ease and can be used for accent light effects.

Switch


On:Off



PRODUCTS CHARACTERISTICS

installation type
material
Finish
Color
Power
Lumen output - Full emission
net weight

trimless recessed
Chalk
Smoothed
White
3 W
170 lm
0,30 kg.

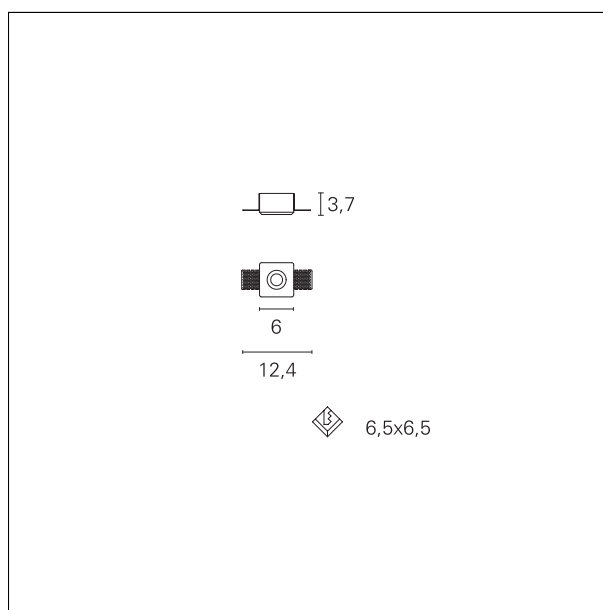

ELECTRICAL CHARACTERISTICS

feeding
driver
Insulation class

220÷240 V
On:Off
Class II

MECHANICAL CHARACTERISTICS

product IP rate

IP20

Plaster 7

INC10518 - 3 W / 3000 K / CRI >80

HOLE RECESS DIMENSIONS

a x b hole recess **65 x 65 mm.**

LED SOURCE DETAILS

led source type	Power Led
Photobiological risk	RG 2 Moderate risk (IEC 62471)
Light temperature	3000 K
CRI	CRI >80

DRIVER CHARACTERISTICS

driver **On:Off**

LIGHTING DETAILS

emission **rotationally symmetrical**