


### Led Panel Smart

**INC1264** - 30 x 60 cm. - 36 W - 3000 K / 3000 K / CRI > 80

#### DESCRIPTION


The Led Panel Smart line is offered in a wide range of versions, in terms of output, colour temperatures and power supplies. All versions are characterized by enhanced luminous emission control to ensure maximum visual comfort, with a UGR value < 19 and the complete absence of flicker.

Switch **1...10 / Push / DALI**

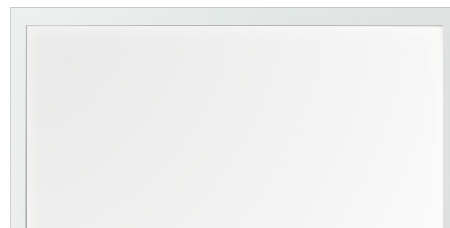

#### PRODUCTS CHARACTERISTICS

|                              |                          |
|------------------------------|--------------------------|
| installation type            | <b>Light Panels</b>      |
| material                     | <b>Extruded aluminum</b> |
| Color                        | <b>White</b>             |
| Power                        | <b>36 W</b>              |
| Lumen output - Full emission | <b>3450 lm</b>           |
| Efficacy                     | <b>96 lm/W</b>           |
| Dimensions                   | <b>30 x 60 cm.</b>       |
| net weight                   | <b>1,5 kg.</b>           |

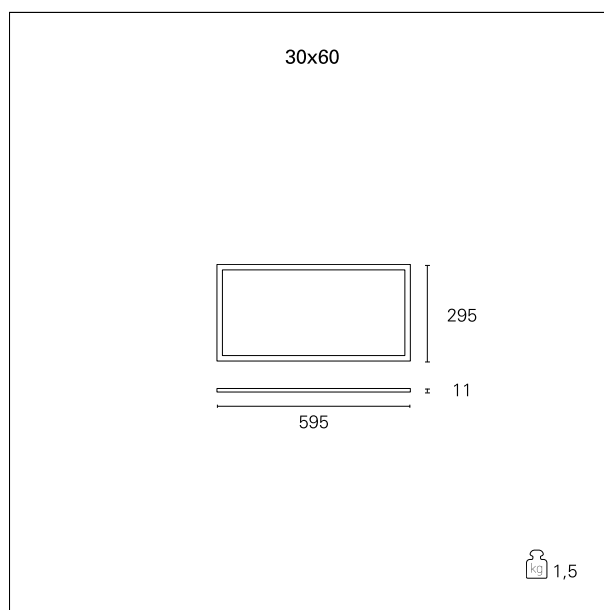

#### ELECTRICAL CHARACTERISTICS

|                  |                             |
|------------------|-----------------------------|
| feeding          | <b>220÷240 V</b>            |
| driver           | <b>1...10 / Push / DALI</b> |
| Insulation class | <b>Class II</b>             |

#### MECHANICAL CHARACTERISTICS

|                 |             |
|-----------------|-------------|
| product IP rate | <b>IP40</b> |
| IK              | <b>IK03</b> |

### Led Panel Smart

**INC1264** - 30 x 60 cm. - 36 W - 3000 K / 3000 K / CRI > 80

#### LED SOURCE DETAILS

|                      |                                  |
|----------------------|----------------------------------|
| led source type      | <b>SMD Led</b>                   |
| Photobiological risk | <b>RG 0 Exempt ( IEC 62471 )</b> |
| Service lifetime     | <b>L80 / B20 - 50.000 h.</b>     |
| Light temperature    | <b>3000 K</b>                    |
| CRI                  | <b>CRI &gt; 80</b>               |

#### DRIVER CHARACTERISTICS

|        |                             |
|--------|-----------------------------|
| driver | <b>1...10 / Push / DALI</b> |
|--------|-----------------------------|

#### LIGHTING DETAILS

|                     |             |
|---------------------|-------------|
| Beam angle - direct | <b>120°</b> |
| UGR                 | <b>≤ 19</b> |

#### PHOTOMETRIC

