

Led Panel Smart


INC1277 - 62 x 62 cm. - 50 W - 4000 K / 4000 K / CRI > 80

DESCRIPTION

The Led Panel Smart line is offered in a wide range of versions, in terms of output, colour temperatures and power supplies. All versions are characterized by enhanced luminous emission control to ensure maximum visual comfort, with a UGR value < 19 and the complete absence of flicker.


Switch

On÷Off

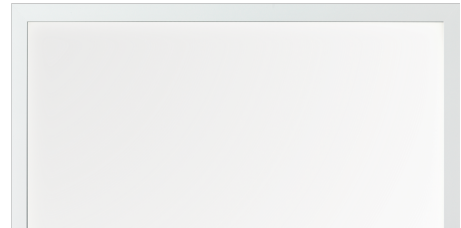

PRODUCTS CHARACTERISTICS

| | |
|------------------------------|--------------------------|
| installation type | Light Panels |
| material | Extruded aluminum |
| Color | White |
| Power | 50 W |
| Lumen output - Full emission | 5100 lm |
| Efficacy | 102 lm/W |
| Dimensions | 62 x 62 cm. |
| net weight | 2,8 kg. |

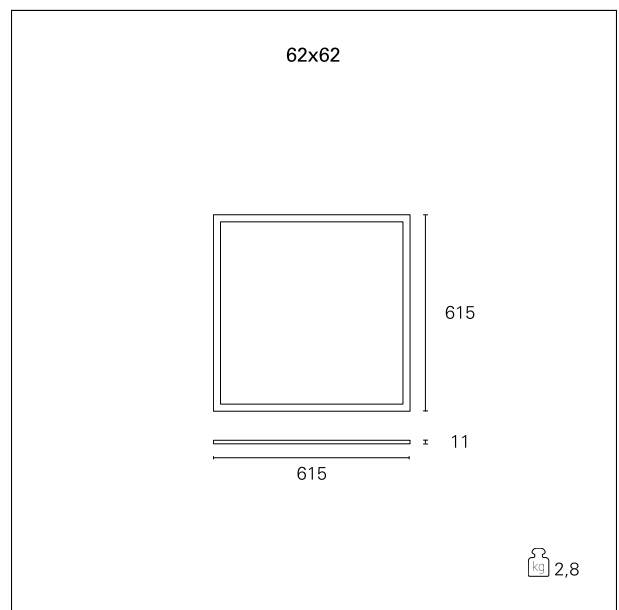

ELECTRICAL CHARACTERISTICS

| | |
|------------------|------------------|
| feeding | 220÷240 V |
| driver | On÷Off |
| Insulation class | Class II |

MECHANICAL CHARACTERISTICS

| | |
|-----------------|-------------|
| product IP rate | IP40 |
| IK | IK03 |

Led Panel Smart

INC1277 - 62 x 62 cm. - 50 W - 4000 K / 4000 K / CRI > 80

LED SOURCE DETAILS

| | |
|----------------------|----------------------------------|
| led source type | SMD Led |
| Photobiological risk | RG 0 Exempt (IEC 62471) |
| Service lifetime | L80 / B20 - 50.000 h. |
| Light temperature | 4000 K |
| CRI | CRI > 80 |

DRIVER CHARACTERISTICS

| | |
|--------|---------------|
| driver | On+Off |
|--------|---------------|

LIGHTING DETAILS

| | |
|---------------------|-------------|
| Beam angle - direct | 120° |
| UGR | ≤ 19 |

PHOTOMETRIC

