

### Puck Extra

**IND01032** - Pendant High Bay - Ø 285 mm. - / 150 W / 4000 K / CRI > 80

#### DESCRIPTION

Suitable for indoor lighting of warehouses and production areas, the Puck Extra series is equipped with SMD LED sources and optical lenses. Die-cast aluminum body for the optimization of heat dissipation. Can be installed in suspension with cable or chain (not included). Direct rotationally symmetrical emission for controlled light.


Switch

On÷Off



#### PRODUCTS CHARACTERISTICS

installation type	<b>High Bays</b>
material	<b>Aluminum die casting</b>
Finish	<b>Painted</b>
Color	<b>Black</b>
Power	<b>150 W</b>
Lumen output - Full emission	<b>19334 lm</b>
Efficacy	<b>129 lm/W</b>
net weight	<b>4 kg.</b>

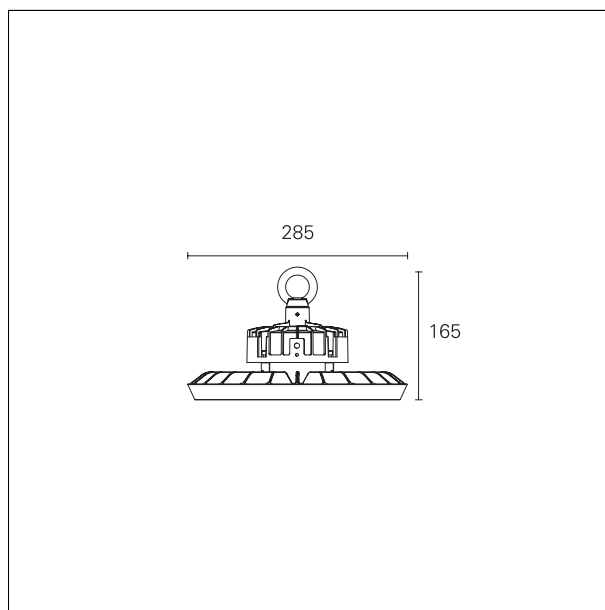

#### ELECTRICAL CHARACTERISTICS

feeding	<b>220÷240 V</b>
driver	<b>On÷Off</b>
Insulation class	<b>Class I</b>

#### MECHANICAL CHARACTERISTICS

product IP rate	<b>IP65</b>
IK	<b>IK08</b>

### Puck Extra

**IND01032** - Pendant High Bay - Ø 285 mm. - / 150 W / 4000 K / CRI > 80

#### LED SOURCE DETAILS

led source type	<b>SMD Led</b>
Service lifetime	<b>L70/B20 - 50.000 h.</b>
Light temperature	<b>4000 K</b>
CRI	<b>CRI &gt; 80</b>

#### DRIVER CHARACTERISTICS

driver	<b>On÷Off</b>
Power factor	<b>&gt; 0,95</b>
Operating temperature	<b>-30°C ÷ 45°C</b>

#### LIGHTING DETAILS

emission	<b>Downlight</b>
optic	<b>60°</b>
UGR	<b>&lt; 22</b>

#### PHOTOMETRIC

