

Cama

PAR00035 - 2 W - squared / 3000 K / CRI > 80

DESCRIPTION

Wall reading lamp . Painted aluminium round or square body. Swivel head of about 45° on the horizontal axis. Integrated high efficiency LED light source. Direct lighting for bright accents. Electronic driver integrated in the fixture. Beam angle 65°.ON/OFF on the base.

Switch


On+Off



PRODUCTS CHARACTERISTICS

installation type
material
Finish
Color
Power
Lumen output - Full emission
net weight

Wall Mounting
Aluminum
Painted
White
2 W
130 lm
0,50 kg.

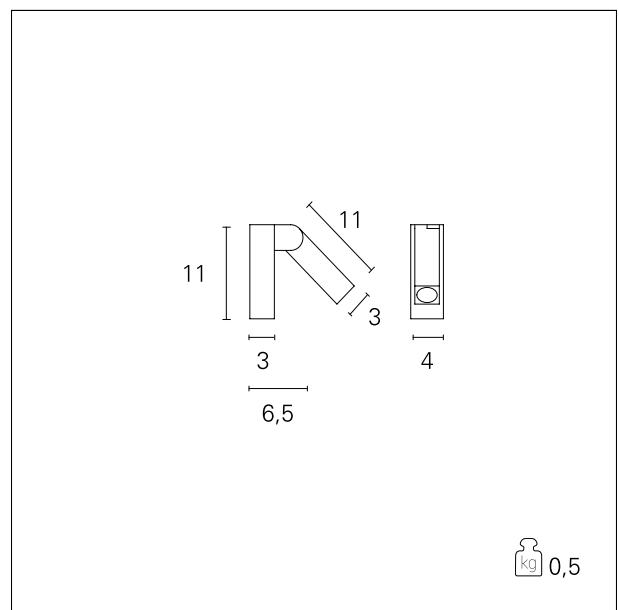

ELECTRICAL CHARACTERISTICS

feeding
driver
Insulation class

220÷240 V
On+Off
Class I

MECHANICAL CHARACTERISTICS

product IP rate

IP20

Cama

PAR00035 - 2 W - squared / 3000 K / CRI > 80

LED SOURCE DETAILS

led source type	Power Led
Light temperature	3000 K
CRI	CRI > 80

DRIVER CHARACTERISTICS

driver	On+Off
--------	---------------