

Eclis

PAR00075 - 4 W / 3000 K / CRI > 80

DESCRIPTION

Wall-mounted luminaire with IP54 protection degree. Made with painted aluminium body and plastic screen. It is equipped with a high efficiency CoB LED source and integrated driver. The device is equipped with a swivel head which, by rotating on the horizontal axis, allows you to create personalized light effects on the wall.

Switch


On+Off



PRODUCTS CHARACTERISTICS

installation type
material
Finish
Color
Power
Lumen output - Full emission
net weight

Wall Mounting
Aluminum
Painted
White
4 W
250 lm
0,60 kg.

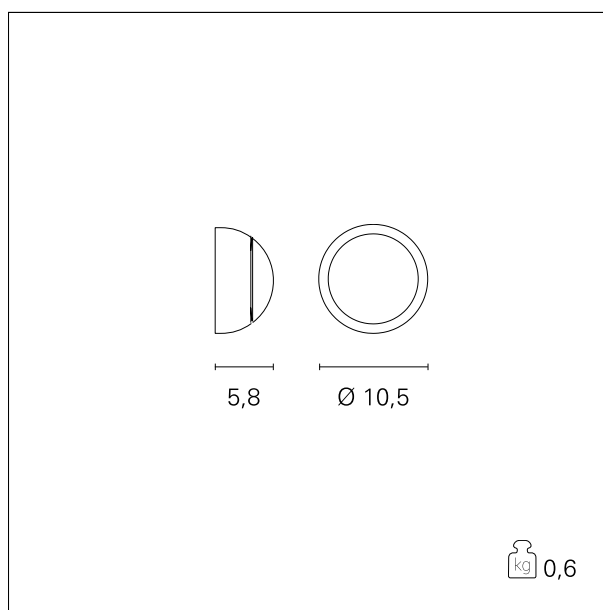

ELECTRICAL CHARACTERISTICS

feeding
driver
Insulation class

220÷240 V
On+Off
Class I

MECHANICAL CHARACTERISTICS

product IP rate

IP54

Eclis

PAR00075 - 4 W / 3000 K / CRI > 80

LED SOURCE DETAILS

led source type	CoB Led
Light source connection	LED
Light temperature	3000 K
CRI	CRI > 80

DRIVER CHARACTERISTICS

driver	On+Off
--------	---------------

LIGHTING DETAILS

emission	Direct
optic	Flood