

Match

PAR04211 - 32 W - 88 cm. / 3000 K / CRI > 80

DESCRIPTION

Match is installed on the wall and is suitable for linear lighting effects. Made of opaque white painted aluminium, it is equipped with a diffusing polycarbonate screen, a high efficiency SMD LED source and an electronic driver integrated in the luminaire. The emission is bidirectional upwards and downwards, due to grazing light effects on the wall.

Switch


On÷Off



PRODUCTS CHARACTERISTICS

installation type
material
Color
Power
Lumen output - Full emission
net weight

Wall Mounting
Aluminum
White
32 W
2808 lm
1,8 kg.

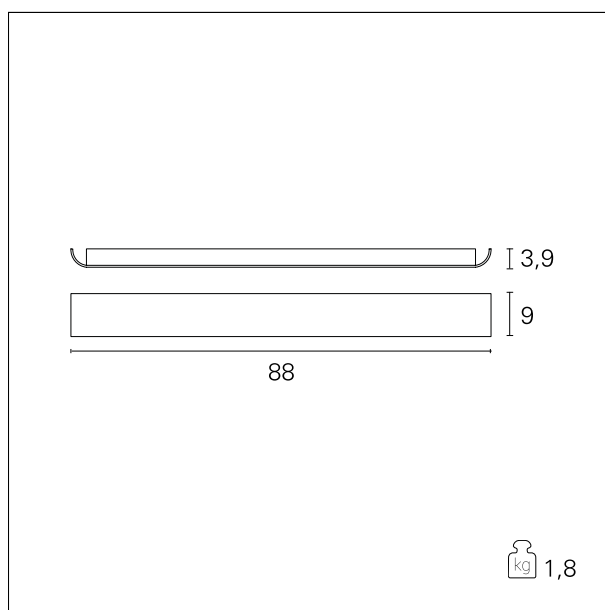

ELECTRICAL CHARACTERISTICS

feeding
driver
Insulation class

220÷240 V
On÷Off
Class I

MECHANICAL CHARACTERISTICS

product IP rate

IP20

Match

PAR04211 - 32 W - 88 cm. / 3000 K / CRI > 80

LED SOURCE DETAILS

led source type	SMD Led
Light source connection	LED
Light temperature	3000 K
CRI	CRI > 80

DRIVER CHARACTERISTICS

driver	On+Off
--------	---------------

LIGHTING DETAILS

emission	Direct / Indirect
----------	--------------------------