


### Boreale

PAR10326 - 2x 6 W / 3000 K / CRI > 80

#### DESCRIPTION

Boreale can be installed in walls and can be painted externally even after the first installation. The light emission is bidirectional and allows to obtain grazing light effects on the wall. The body is made of smooth white plaster and is complete with diffusing glass screen, high efficiency LED source and integrated driver. The range is completed by the version for light sources with E14 socket.




Switch

On+Off

#### PRODUCTS CHARACTERISTICS

installation type  
material  
Finish  
Color  
Power  
Lumen output - Full emission  
net weight

**Wall Mounting**  
**Chalk**  
**Smoothed**  
**White**  
**2x 6 W**  
**2x 500 lm**  
**1,3 kg.**

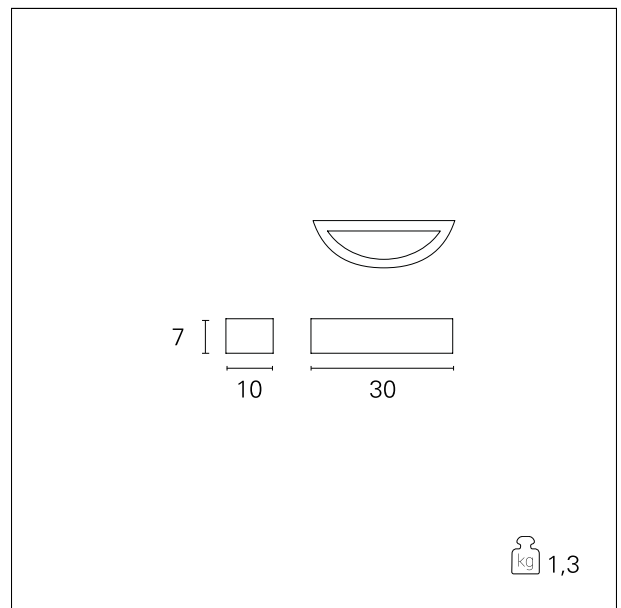

#### ELECTRICAL CHARACTERISTICS

feeding  
driver  
Insulation class

**220÷240 V**  
**On+Off**  
**Class I**

#### MECHANICAL CHARACTERISTICS

product IP rate

**IP20**

### Boreale

**PAR10326** - 2x 6 W / 3000 K / CRI > 80

#### LED SOURCE DETAILS

led source type	<b>SMD Led</b>
Light source connection	<b>LED</b>
Light temperature	<b>3000 K</b>
CRI	<b>CRI &gt; 80</b>

#### DRIVER CHARACTERISTICS

driver	<b>On+Off</b>
--------	---------------

#### LIGHTING DETAILS

emission	<b>Indirect</b>
----------	-----------------