

Idra

PAR10328 - 2x 6 W / 3000 K / CRI > 80

DESCRIPTION

Wall mounted fixture. The body of the appliance is made of smooth white plaster, which makes it paintable externally even after the first installation. Integrated high efficiency LED source. Bidirectional emission for grazing light effects on the wall. Electronic driver integrated.

Switch


On÷Off



PRODUCTS CHARACTERISTICS

installation type
material
Color
Power
Lumen output - Full emission
net weight

Wall Mounting
Aluminum
White
2x 6 W
2x 500 lm
1,5 kg.

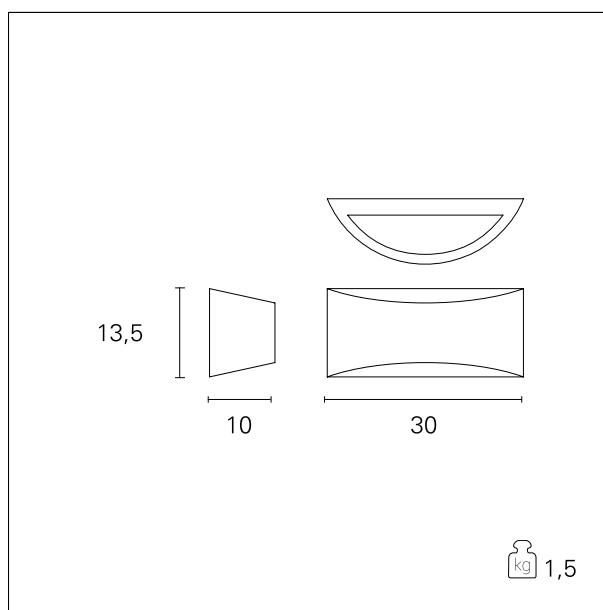

ELECTRICAL CHARACTERISTICS

feeding
driver
Insulation class

220÷240 V
On÷Off
Class I

MECHANICAL CHARACTERISTICS

product IP rate

IP20

Idra

PAR10328 - 2x 6 W / 3000 K / CRI > 80

LED SOURCE DETAILS

led source type	SMD Led
Light source connection	LED
Light temperature	3000 K
CRI	CRI > 80

DRIVER CHARACTERISTICS

driver	On÷Off
--------	---------------

LIGHTING DETAILS

emission	Direct / Indirect
----------	--------------------------