

Oberon

PAR321 - 2x 3 W / 3000 K / CRI > 80

DESCRIPTION

Wall luminaire. White polished plaster body. Front antiglare diffuser. Integrated high efficiency LED light source. Bidirectional emission for grazing light effects. Electronic driver integrated in the fixture. Paintable product.

Switch


On:Off



PRODUCTS CHARACTERISTICS

installation type
material
Color
Power
Lumen output - Full emission
net weight

Wall Mounting
Aluminum
White
2x 3 W
300 lm
0,70 kg.

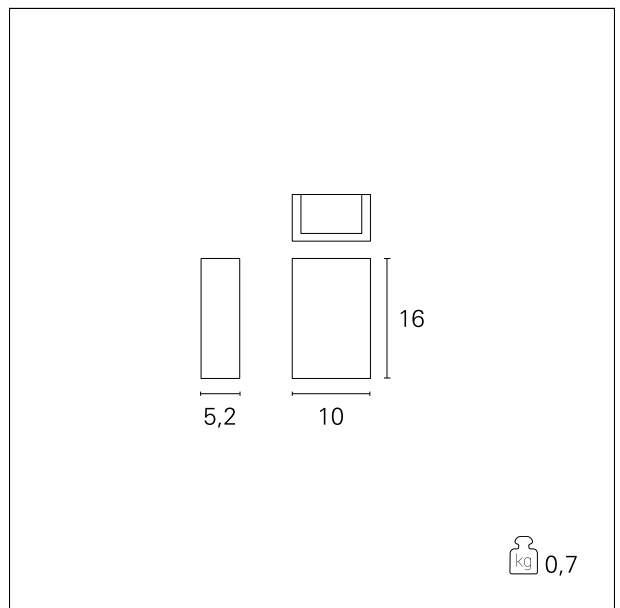

ELECTRICAL CHARACTERISTICS

feeding
driver
Insulation class

220÷240 V
On:Off
Class I

MECHANICAL CHARACTERISTICS

product IP rate

IP20

Oberon

PAR321 - 2x 3 W / 3000 K / CRI > 80

LED SOURCE DETAILS

led source type	Power Led
Light temperature	3000 K
CRI	CRI > 80

DRIVER CHARACTERISTICS

driver	On+Off
--------	---------------

LIGHTING DETAILS

emission	Direct / Indirect
----------	--------------------------