


### Hoop

PLA00137CA - 42 W / 3000 K / CRI > 80

#### DESCRIPTION

Hoop is aluminium ceiling luminaire matt white painted, equipped with a diffusing screen in PMMA. It allows to obtain a soft and diffused light to illuminate indoor ambients comfortably and without harsh shadows. The driver is included in the fixture, it can be On/Off or dimmable multifunction 1...10 V, Push, DALI controlled, and feeds a highly efficient SMD LED source. Hoop is available in the ceiling version in different sizes and light emissions and is completed with the same suspension versions. Available in dimmable "wireless signal" Bluetooth versions for Pan Digital or Casambi mesh network.

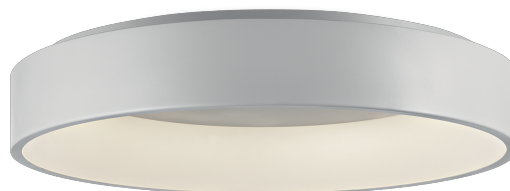


Switch

Casambi

#### PRODUCTS CHARACTERISTICS

installation type	<b>Plafone</b>
material	<b>Alluminio</b>
Finish	<b>Verniciato</b>
Color	<b>Bianco</b>
Power	<b>42 W</b>
Lumen output - Direct emission	<b>2520 lm</b>
Lumen output - Full emission	<b>2520 lm</b>
Efficacy	<b>\</b>
Diameter	<b>ø 60 cm.</b>
net weight	<b>2,3 kg.</b>

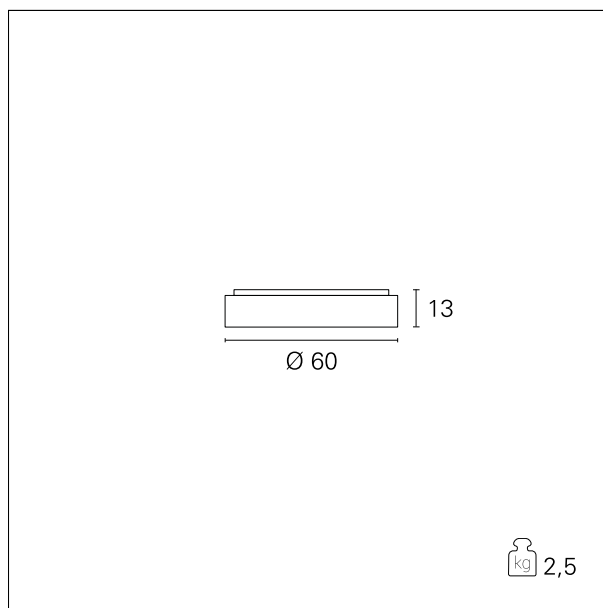

#### ELECTRICAL CHARACTERISTICS

feeding	<b>220÷240 V</b>
driver	<b>Casambi</b>
Insulation class	<b>Classe I</b>

#### MECHANICAL CHARACTERISTICS

product IP rate	<b>IP20</b>
-----------------	-------------


### Hoop

PLA00137CA - 42 W / 3000 K / CRI > 80

#### ENERGY CLASSIFICATION



This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

#### LED SOURCE DETAILS

led source type	<b>SMD Led</b>
Light source connection	<b>LED</b>
Energy class	<b>LED</b>
Light temperature	<b>3000 K</b>
CRI	<b>CRI &gt; 80</b>
SDCM	<b>\</b>

#### DRIVER CHARACTERISTICS

driver	<b>Casambi</b>
--------	----------------


#### LIGHTING DETAILS

emission	<b>Diretta</b>
optic	<b>160°</b>
UGR	<b>\</b>

### Hoop

PLA00137CA - 42 W / 3000 K / CRI > 80

### PHOTOMETRIC

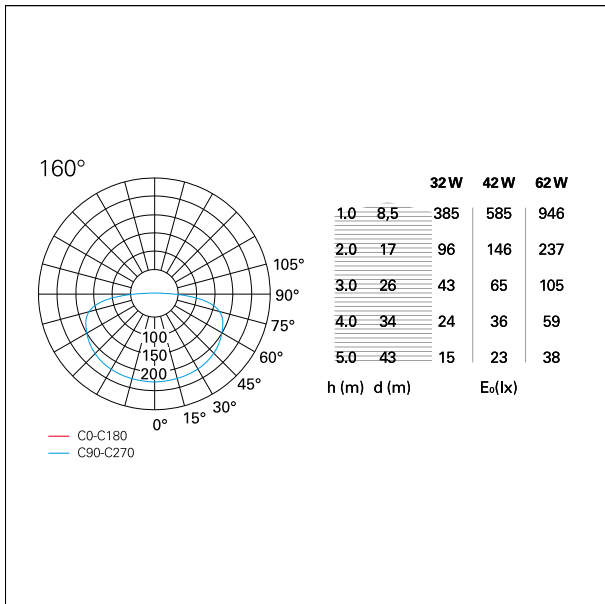

### WARRANTY

period

**2 years**