

Hoop

PLA00137DA - 42 W / 3000 K / CRI > 80

DESCRIPTION


Hoop is aluminium ceiling luminaire matt white painted, equipped with a diffusing screen in PMMA. It allows to obtain a soft and diffused light to illuminate indoor ambients comfortably and without harsh shadows. The driver is included in the fixture, it can be On/Off or dimmable multifunction 1...10 V, Push, DALI controlled, and feeds a highly efficient SMD LED source. Hoop is available in the ceiling version in different sizes and light emissions and is completed with the same suspension versions. Available in dimmable "wireless signal" Bluetooth versions for Pan Digital or Casambi mesh network.



Switch 1...10 / Push / DALI

PRODUCTS CHARACTERISTICS

installation type	Plafone
material	Alluminio
Finish	Verniciato
Color	Bianco
Power	42 W
Lumen output - Direct emission	2520 lm
Lumen output - Full emission	2520 lm
Efficacy	\
Diameter	ø 60 cm.
net weight	2,3 kg.

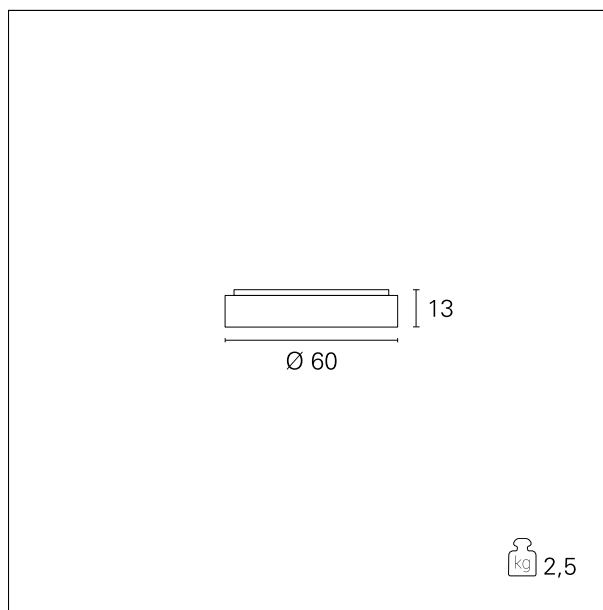

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
driver	1...10 / Push / DALI
Insulation class	Classe I

MECHANICAL CHARACTERISTICS

product IP rate	IP20
-----------------	-------------


Hoop

PLA00137DA - 42 W / 3000 K / CRI > 80

ENERGY CLASSIFICATION



This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

LED SOURCE DETAILS

led source type	SMD Led
Light source connection	LED
Energy class	LED
Light temperature	3000 K
CRI	CRI > 80
SDCM	\

DRIVER CHARACTERISTICS

driver	1...10 / Push / DALI
--------	-----------------------------


LIGHTING DETAILS

emission	Diretta
optic	160°
UGR	\

Hoop

PLA00137DA - 42 W / 3000 K / CRI > 80

PHOTOMETRIC

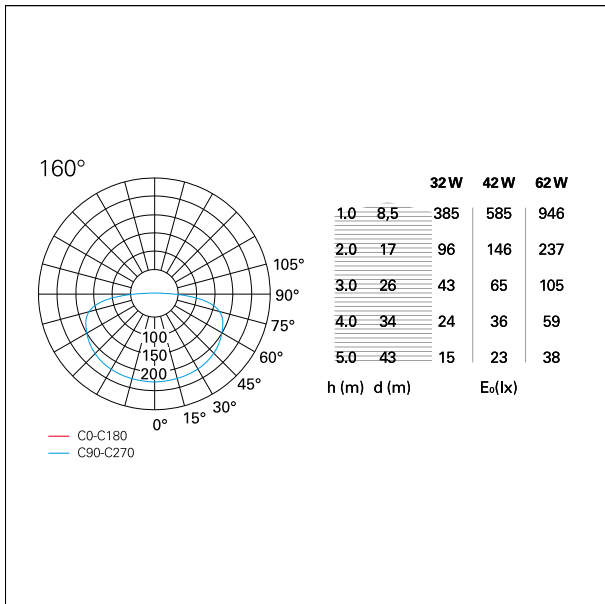

WARRANTY

period

2 years