

Hoop

PLA00139DA - ø 80 cm. - 62 W - 3720 lm / 3000 K / CRI > 80

DESCRIPTION


Hoop is aluminium ceiling luminaire matt white painted, equipped with a diffusing screen in PMMA. It allows to obtain a soft and diffused light to illuminate indoor ambients comfortably and without harsh shadows. The driver is included in the fixture, it can be On/Off or dimmable multifunction 1...10 V, Push, DALI controlled, and feeds a highly efficient SMD LED source. Hoop is available in the ceiling version in different sizes and light emissions and is completed with the same suspension versions. Available in dimmable "wireless signal" Bluetooth versions for Pan Digital or Casambi mesh network.



Switch **1...10 / Push / DALI**

PRODUCTS CHARACTERISTICS

installation type	ceiling lamps
material	Aluminum
Finish	Painted
Color	White
Power	62 W
Lumen output - Full emission	3720 lm
Diameter	ø 80 cm.
net weight	3 kg.

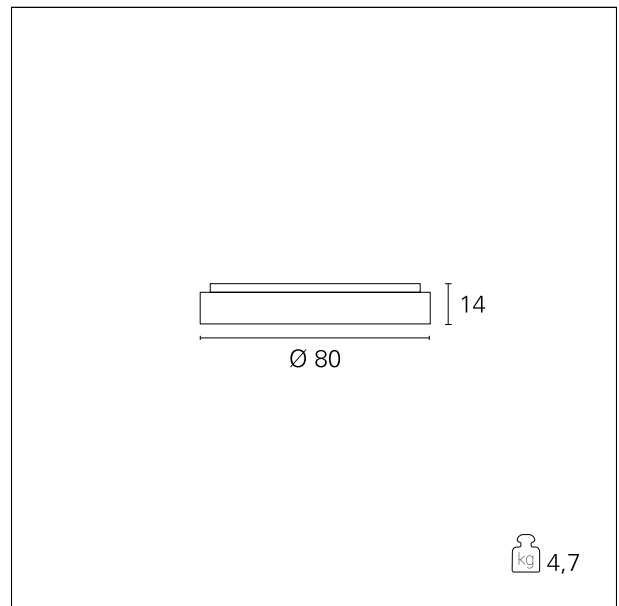

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
driver	1...10 / Push / DALI
Insulation class	Class I

MECHANICAL CHARACTERISTICS

product IP rate	IP20
-----------------	-------------

Hoop

PLA00139DA - ø 80 cm. - 62 W - 3720 lm / 3000 K / CRI > 80

LED SOURCE DETAILS

led source type	SMD Led
Light source connection	LED
Light temperature	3000 K
CRI	CRI > 80

DRIVER CHARACTERISTICS

driver	1...10 / Push / DALI
--------	-----------------------------

LIGHTING DETAILS

luminous effect	diffused light
optic	160°

PHOTOMETRIC

