

Hoop

PLA00139PD - ø 80 cm. - 62 W - 3720 lm / 3000 K / CRI > 80

DESCRIPTION

Hoop is aluminium ceiling luminaire matt white painted, equipped with a diffusing screen in PMMA. It allows to obtain a soft and diffused light to illuminate indoor ambients comfortably and without harsh shadows. The driver is included in the fixture, it can be On/Off or dimmable multifunction 1...10 V, Push, DALI controlled, and feeds a highly efficient SMD LED source. Hoop is available in the ceiling version in different sizes and light emissions and is completed with the same suspension versions. Available in dimmable "wireless signal" Bluetooth versions for Pan Digital or Casambi mesh network.




Switch

Pan Digital

PRODUCTS CHARACTERISTICS

installation type
material
Finish
Color
Power
Lumen output - Full emission
Diameter
net weight

ceiling lamps
Aluminum
Painted
White
62 W
3720 lm
ø 80 cm.
3 kg.

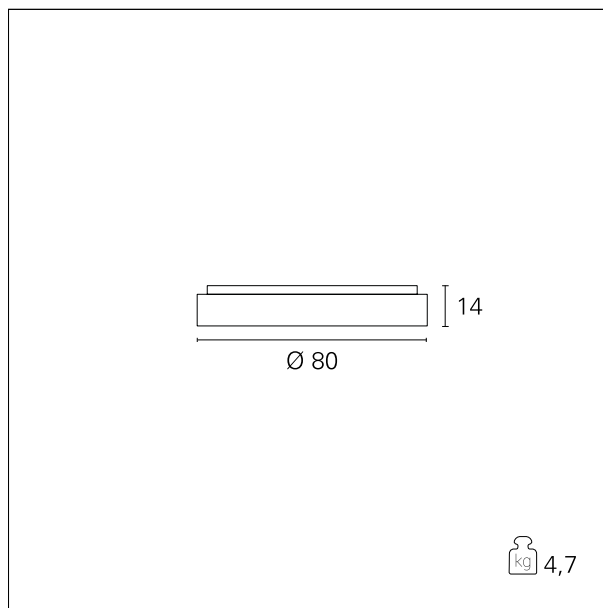

ELECTRICAL CHARACTERISTICS

feeding
driver
Insulation class

220÷240 V
Pan Digital
Class I

MECHANICAL CHARACTERISTICS

product IP rate

IP20

Hoop

PLA00139PD - ø 80 cm. - 62 W - 3720 lm / 3000 K / CRI > 80

LED SOURCE DETAILS

led source type	SMD Led
Light source connection	LED
Light temperature	3000 K
CRI	CRI > 80

DRIVER CHARACTERISTICS

driver	Pan Digital
--------	--------------------

LIGHTING DETAILS

luminous effect	diffused light
optic	160°

PHOTOMETRIC

