

Focus

RTB34216 - Squared - Adj / 4,5 W / 4000 K / CRI >80

DESCRIPTION


Small and performing, the Focus series of recessed minispots create precise accents of light without glare thanks to the backward position of the LED source. In the fixed and adjustable versions, the Focus minispots emit bright light within a sharp and smudge-free beam with only 4.5 W of electricity absorption. The LEDs selected from the first labels and the body entirely made of die-cast aluminum ensure both a long life to the LED source and the constancy of its colorimetric characteristics over time (L80 / B20 at 50,000 hours). Focus is available in a matt white and matt black finish and complete of wired driver.



Switch **On:Off**

PRODUCTS CHARACTERISTICS

installation type	Recessed Spotlights
material	Aluminum
Color	Black
Power	4,5 W
Lumen output - Full emission	215 lm
Efficacy	86 lm/W
Dimensions	50 x 50 mm.
net weight	0,10 kg.

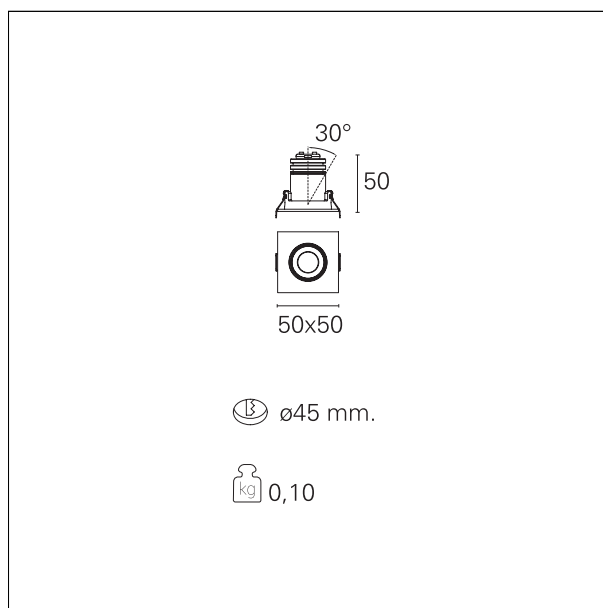

ELECTRICAL CHARACTERISTICS

driver **On:Off**

MECHANICAL CHARACTERISTICS

product IP rate **IP20**

HOLE RECESS DIMENSIONS

Focus

RTB34216 - Squared - Adj / 4,5 W / 4000 K / CRI >80

hole recess diameter **ø 45 mm.**

LED SOURCE DETAILS

led source type	Power Led
Photobiological risk	RG 1 Low risk (IEC 62471)
LED current	700 mA
Light temperature	4000 K
CRI	CRI >80
SDCM	< 3

DRIVER CHARACTERISTICS

driver **On+Off**

LIGHTING DETAILS

luminous effect	spot
optic	20°
Beam angle - direct	20°

PHOTOMETRIC

