

Nemo TL Fix

RTT21544CA - Trimless + Matt White Reflector - 10 W - 920 lumen / 2700 K / CRI >90

DESCRIPTION

Nemo TL is the trimless series of the Nemo family designed for installations in plasterboard false ceilings with no visible edge. Models up to 24W are equipped with a pre-drilled fixed frame for direct fixing of the luminaire to the false ceiling; The 33W and 42W models are equipped with height-adjustable fixing frame. Four beam openings with 38 $^{\circ}$ cut-off and versions up to UGR <17 allow to obtain the right balance between luminance control and light diffusion. The lighting modules are all equipped with latest generation LEDs with CRI> 90 and SDCM <3. The range of Nemo TL Adj and Nemo TL Fix has interchangeable secondary reflectors available in five different aesthetic finishes that allow the system to be characterized even after the first installation. The safety cable supplied prevents accidental drops and the "fast plug" connection system to the driver allows quick and safe installation. Nemo ADJ version for accent lighting with 350 ° adjustability on the horizontal plane and 30 ° on the vertical plane. Nemo Fix is perfect for vertical lighting for the control of direct glare and soft light at the edges of the beam.




Switch

Casambi

PRODUCTS CHARACTERISTICS

installation type material Color Power Lumen output - Full emission Efficacy Diameter Dimensions net weight trimless recessed Aluminum Matt white 10 W 899 Im 90 Im/W Ø 71 mm. h 89 mm. 0,28 kg.

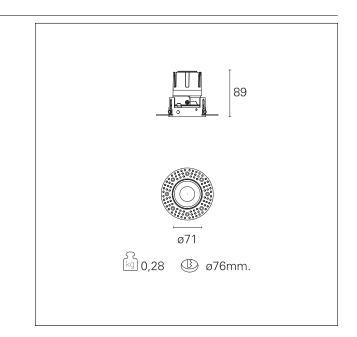

ELECTRICAL CHARACTERISTICS

| feeding driver | 220÷240 V Casambi | |
|---|---|--|
| PAN International Srl Via G. Michelucci, 1 50028 Barberino Tavarnelle | Tel. +39 055 80 59 336/7 Fax +39 055 80 59 338 panint@panint.it | This datasheet is property of Pan International Srl. All rights reserved. We reserve the right to make technical changes without notice. |
| Firenze, Italy | www.panint.it | Uploaded 31/03/21 - pg 1 / 3 |



Nemo TL Fix

RTT21544CA - Trimless + Matt White Reflector - 10 W - 920 lumen / 2700 K / CRI >90

| Insulation class | Class II |
|---|----------------------|
| MECHANICAL CHARACTERISTICS | |
| optical compartment IP rate recessed compartment IP rate IK | IP40 IP20 IK02 |
| HOLE RECESS DIMENSIONS | |
| hole recess diameter | Ø 76 mm. |

ENERGY CLASSIFICATION



LED SOURCE DETAILS

| led source type | CoB Led |
|-------------------|-----------------------|
| LED brand | Bridgelux |
| LED current | 250 mA |
| LED voltage | 36 V |
| Service lifetime | L80 / B20 - 50.000 h. |
| Light temperature | 2700 K |
| CRI | CRI >90 |
| SDCM | < 3 |

DRIVER CHARACTERISTICS

| driver | Casambi |
|-----------------------|--------------|
| Power factor | > 0,5 |
| Operating temperature | -20°C ÷ 45°C |



Nemo TL Fix

RTT21544CA - Trimless + Matt White Reflector - 10 W - 920 lumen / 2700 K / CRI >90

LIGHTING DETAILS

| emission | rotationally symmetrical |
|---------------------|--------------------------|
| luminous effect | wide |
| optic | 55° |
| Beam angle - direct | 55° |
| UGR | ≤ 19 |
| Cut Hood | 38° |

PHOTOMETRIC

